Color-changer set + PAR-36 pinspot

highlights

No. 50800530

Comes in a sales-promoting 4-color-carton
EUROLITE T-36 Pinspot black
Lamp OMNILUX PAR 36, 6 V/30 W, 200 h, VNSP
Color wheel with motor

• Comes in a sales-promoting 4-color-carton • EUROLITE T-36 Pinspot black • Lamp OMNILUX PAR 36, 6 V/30 W, 200 h, VNSP • Color-wheel with motor for T36

Technical specifications:

T-36 Pinspot:	
Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*30 W*
Weight:	*1 kg*
Dimensions (LxWxH):	*150 x 120 x 115 mm*
Fitting lamp:	*6 V/30 W PAR-36*
Colour-wheel with motor:	
Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*4 W*
Rotation speed:	*ca. 4 RPM*
Colours:	*red, green, yellow, blue*
Diameter:	*23 cm*
Weight:	*0.1 kg*

Accessories:

GE 4515 PAR-36 6,4V/30W VNSP 100h	*No. 88061000*
OMNILUX PAR-36 6.4V/30W G53 VNSP 200h	*No. 88061005*
GE 4511 PAR-36 6.2V/30W WFL 300h	*No. 88061200*
GE H4515 PAR-36 6V/30W halo 100h	*No. 88062000*

Color wheel with motor for Pinspot T-36

highlights

No. 50805090

For all spotlights with even brim
Permanently turning color wheel
Four color fields (red, yellow, green, blue)

• For all spotlights with even brim • Permanently turning colour wheel with 4 rotations per minute • Four colour fields (red, yellow, green, blue) • Easy fixing at the tube rim of the spotlight • Diameter of wheel 23 cm • The ideal accessory, if e. g. a mirror ball is to be illuminated • 220 V connection • Delivery without Pinspot

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*4 W*
Rotation-speed:	*approx. 4 RPM*
Colours:	*Red, green, yellow, blue*
Diameter:	*23 cm*
Weight:	*0.3 kg*

Accessories:

EUROLITE T-36 pinspot PAR-36, chrome	*No. 50800405*
EUROLITE T-36 pinspot PAR-36, black	*No. 50800360*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE TC-5 DMX Color changer incl.lamp

highlights

No. 51785875

Rainbow effect with adjustable speed
Manual focus
DMX control only via DMX Wizard

• Colour-wheel with 10 dichroic colour-filtres + white + closed • Rainbow-effect with adjustable speed in both directions • Manual focus • DMX-control only via DMX-Wizard • 2 DMX-control-channels required • 1 channel for the colour wheel and a second one for the electronic dimmer • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Sound-controlled colour-wheel via DMX adjustable • Master/Slave-function • EHJ 24 V/250 W G-6.35 lamp included in the delivery

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*300 W*
DMX-control-channels:	*2*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Number of colours:	*10 dichroic + white*
Dimensions (LxWxH):	*320 x 280 x 280 mm*
Weight:	*9 kg*

Accessories:

OMNILUX EHJ 24V/250W G-6.35 50h 3000K	*No. 88289005*
OSRAM EHJ 64655HLX A1/223 24V/250W G-6.35	*No. 88289010*
OMNILUX EHJ 24V/250W G-6.35 500h 3000K	*No. 88289105*
OMNILUX EVC 24V/250W G-6.35 300h	*No. 88290005*
OSRAM 64657HLX EVC M33 24V/250W G-6.35	*No. 88290010*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*

eurolite *Lighting effects*

EUROLITE TC-150 DMX Color changer spot

highlights

No. 51786265

For bright 150 W discharge lamp
Gobo wheel with 10 gobos and 5 beam shapers
Manual focus

• DMX-controlled operation or stand alone operation with Master/Slave-function • For bright 150 W/250 W discharge lamp • Colour-wheel with 12 dichroic colour-filtres, 2 bi-colour-filters and white • Gobo-wheel with 10 gobos and 5 beam-shapers • Manual focus • Strobe-effect with adjustable speed (1-7 flashes/sec.) • DMX-control via every standard DMX-controller • 3 DMX-control-channels required • Sound-controlled via built-in microphone • 3 high-quality stepping-motors • Suitable EUROLITE controllers: DMX Operator

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*320 W*
DMX-control-channels:	*3*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Flash-rate:	*1-7 Hz*
Number of colours:	*14 dichroic + white*
Number of gobos:	*10 gobos, 5 beam-shapers*
Dimensions (LxWxH):	*315 x 270 x 285 mm*
Weight:	*7 kg*

Accessories:

OSRAM HCI-T150/NDL PRO 6000h 150W G12	*No. 91201794*
Topspot HIT 150W G-12 6000h 4200K nw	*No. 91201797*
GE CMH 150/T G12 6000h 830 3000K	*No. 91201800*
OMNILUX ODM 150W G-12 6000h 4200K	*No. 91201805*
PHILIPS CDM-T 150W/830 G12 3000K	*No. 91014045*
OSRAM 4ARXS HSD 97V/150W G-12 7000K 2000h	*No. 89101910*
EUROLITE DMX operator 192 channels	*No. 70064520*
EUROLITE DMX scan control 192 channels	*No. 70064525*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*

EUROLITE TC-250 DMX Color changer spot

highlights

No. 51786275

For MSD/HSD 250 or MSD 250/2 lamp
Gobo wheel with 10 gobos and 5 beam shapers
Manual focus

• DMX-controlled operation or stand alone operation with Master/Slave-function • For MSD/HSD 250 or MSD 250/2 lamp • Colour-wheel with 12 dichroic colour-filtres, 2 bi-colour-filters and white • Gobo-wheel with 10 gobos and 5 beam-shapers • Manual focus • Strobe-effect with adjustable speed (1-7 flashes/sec.) • DMX-control via every standard DMX-controller • 3 DMX-control-channels required • Sound-controlled via built-in microphone • 3 high-quality stepping-motors • Suitable EUROLITE controllers: DMX Operator

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*575 W*
DMX-control-channels:	*3*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Flash-rate:	*1-7 Hz*
Number of colours:	*14 dichroic + white*
Number of gobos:	*10 gobos, 5 beam-shapers*
Dimensions (LxWxH):	*315 x 270 x 285 mm*
Weight:	*7 kg*

Accessories:

OMNILUX OBA250/2SE D 90V/250W GY9.5 8500K	*No. 89106108*
OMNILUX OSD 90V/250W GY-9.5 2000h 6700K	*No. 89106005*
OSRAM HSD 250/60 90V/250W GY-9.5 2000h	*No. 89106010*
PHILIPS MSD250 90V/250W GY-9.5 2000h	*No. 89106015*
GE CSD250/2 95V/250W GY-9.5 2000h 8500K	*No. 89106100*
OMNILUX OSD 250/2 94V/250W 2000h 8000K	*No. 89106105*
PHILIPS MSD250/2 90V/250W GY-9.5 2000h	*No. 89106115*
SYLVANIA BA250/2SE D 90V/250W GY9.5 8500K	*No. 89106120*
OSRAM HSD250/80 95/250W GY9.5 3000h 8000K	*No. 89106210*
EUROLITE DMX operator 192 channels	*No. 70064520*
EUROLITE DMX scan control 192 channels	*No. 70064525*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

highlights

EUROLITE TC-200 DMX Color changer white

No. 51786270

• In a white housing • DMX-controlled operation or stand alone operation with Master/Slave-function • For bright 150 W/250 W discharge lamp • Color wheel with 7 dichroic color filters and white • Mechanic dimmer • Strobe effect with adjustable speed (1-7 flashes/sec.) • DMX control via every standard DMX controller • 3 DMX control-channels required • Sound-controlled via built-in microphone • 3 high-quality stepping motors • Suitable EUROLITE controllers: DMX Operator

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*320 W*
DMX-control-channels:	*3*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Flash-rate:	*1-7 Hz*
Number of colours:	*7 dichroic + white*
Dimensions (LxWxH):	*300 x 280 x 290 mm*
Weight:	*7 kg*

Accessories:

OSRAM HCI-T150/NDL PRO 6000h 150W G12	*No. 91201794*
Topspot HIT 150W G-12 6000h 4200K nw	*No. 91201797*
GE CMH 150/T G12 6000h 830 3000K	*No. 91201800*
OMNILUX ODM 150W G-12 6000h 4200K	*No. 91201805*
PHILIPS CDM-T 150W/830 G12 3000K	*No. 91014045*
OSRAM 4ARXS HSD 97V/150W G-12 7000K 2000h	*No. 89101910*
EUROLITE DMX operator 192 channels	*No. 70064520*
EUROLITE DMX scan control 192 channels	*No. 70064525*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*

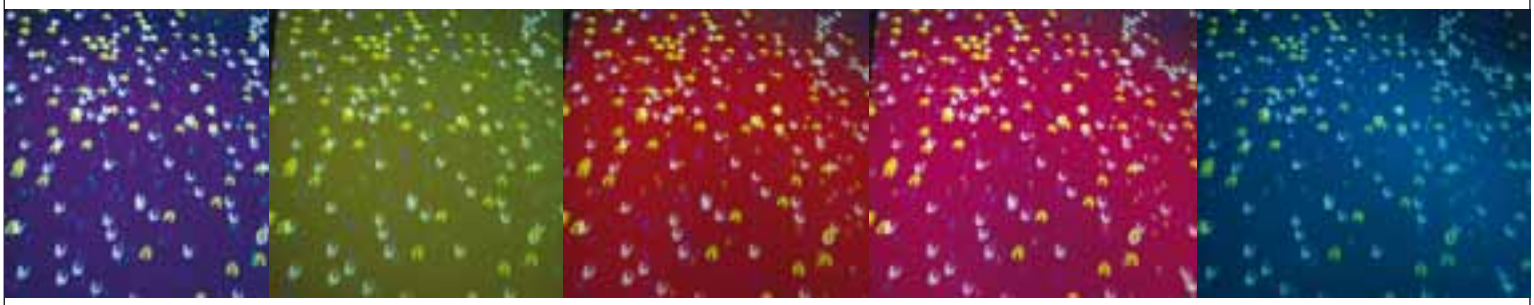

highlights

EUROLITE TC-300 DMX color changer wash

No. 51786290

• DMX-controlled operation or stand alone operation with Master/Slave function • For MSD/HSD 250 or MSD 250/2 lamp • Color wheel with 7 dichroic color filters and white • Mechanic dimmer • Strobe effect with adjustable speed (1-7 flashes/sec.) • DMX control via every standard DMX controller • 3 DMX control-channels required • Sound-controlled via built-in microphone • 3 high-quality stepping motors • Suitable EUROLITE controllers: DMX Operator

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*400 W*
DMX-control-channels:	*3*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Flash-rate:	*1-7 Hz*
Number of colours:	*7 dichroic + white*
Dimensions (LxWxH):	*300 x 280 x 290 mm*
Weight:	*7 kg*

Accessories:

OMNILUX OBA250/2SE D 90V/250W GY9.5 8500K	*No. 89106108*
OMNILUX OSD 90V/250W GY-9.5 2000h 6700K	*No. 89106005*
OSRAM HSD 250/60 90V/250W GY-9.5 2000h	*No. 89106010*
PHILIPS MSD250 90V/250W GY-9.5 2000h	*No. 89106015*
GE CSD250/2 95V/250W GY-9.5 2000h 8500K	*No. 89106100*
OMNILUX OSD 250/2 94V/250W 2000h 8000K	*No. 89106105*
PHILIPS MSD250/2 90V/250W GY-9.5 2000h	*No. 89106115*
SYLVANIA BA250/2SE D 90V/250W GY9.5 8500K	*No. 89106120*
OSRAM HSD250/80 95/250W GY9.5 3000h 8000K	*No. 89106210*
EUROLITE DMX operator 192 channels	*No. 70064520*
EUROLITE DMX scan control 192 channels	*No. 70064525*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

highlights

FUTURELIGHT PCC-500F PRO-Colour-Changer

No. 51840960

For 575 W halogen lamp
Electronic dimmer

• DMX-controlled operation or stand alone operation with master/slave function • 48 programmed scenes in program run for stand alone operation • Number of scenes in program run can be changed individually • Scenes in program run can be modified via the control board or via an external controller and loaded into the memory • 8 built-in programs can be called up via DMX controller • Sound-controlled via built-in microphone • Control board with 4-digit display and foil-keyboard for adjusting the DMX starting address, Program, Reset • For bright HPL 575 W lamp • Color wheel 1 with 5 different, dichroic color filters and white • Color wheel 2 with 4 different, dichroic color filters, blackout and white • DMX control via every standard DMX controller

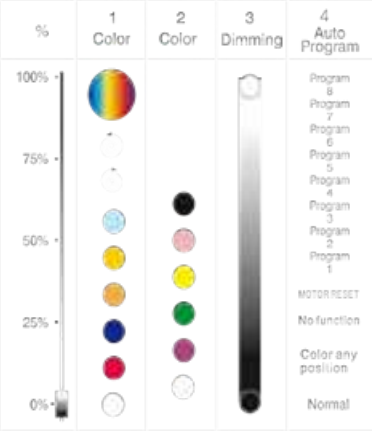





Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*585 W*
DMX-control-channels:	*4*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Colour-wheel 1:	*5 colours and white*
Colour-wheel 2:	*4 colours, blackout and white*
Beam angle:	*approx. 23°*
Dimensions (LxWxH):	*325 x 435 x 350 mm*
Weight:	*12 kg*

Accessories:

GE HPL575 240V/575W 300h 3200K	*No. 88315000*
GE HPL575X 240V/575W 1500h 3050K Longl	*No. 88315700*
Barndoors for PCC-250/PCC-500	*No. 51840955*
FUTURELIGHT EX-6/32 controller	*No. 51834046*
FUTURELIGHT CP-240 controller	*No. 51834265*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*
FUTURELIGHT FS-1 Floor Stand for spots	*No. 51840956*

Flightcase for 4x PCC-250 + wheel board

No. 51836853

• Compartments for 4 units and accessory • Interior and cover (not removable) upholstered with foam and black felt cover • High-quality workmanship with 7 mm plywood multilayered glued, black laminated • Aluminum profile frames (30 mm) with rounded edges • Three-leg, large steel ball corners (chromium plated) • 4 castors, 2 of which with locking brakes • 2 large butterfly locks (with locking function) • 2 hinged, chromium plated case handles • Caution! Units must be cooled down to room temperature!

Technical specifications:

Max. load:	*60 kg*
Strength:	*7mm*
Dimensions:	*1290 x 500 x 580 mm*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

highlights

FUTURELIGHT PCC-575 CMY PRO-Colour-Changer

No. 51840965

For 575 W discharge lamp, GX 9,5
CMY color mixture
Frost filter for softer beam
Motorized zoom (19-27°)

• CMY colour mixing • Colour-wheel with additional 4 discrete dichroic filters plus open, 3200 K and 5600 K correction-filters, UV-filter • Macro-function for combinations between CMY-colour mixing and colour-wheel • Frost-filter for softer beam • Beam-shape effect: wide and flat beam can steplessly be rotated by 180° • Strobe-effect of 1-13 flash per sec. • Remotely switching of the lamp • Built-in demo sequence • Remote reset function • Motorized zoom (19-27°) • For MSR 575/2 GX-9.5 lamp • DMX-control via every standard DMX-controller • DMX-controlled operation or stand alone operation with Master/Slave-function • 48 preprogrammed scenes in Program Run for stand alone operation • Number of scenes in Program Run can be changed individually • The scenes in Program Run can be modified via the Control Board or via an external controller and loaded into the memory • 8 built-in programs can be called up via DMX-controller • Sound-controlled via built-in microphone • Control-Board with 4-digit display and foil-keyboard for adjusting the DMX-starting address, Program, Reset, lamp on/off

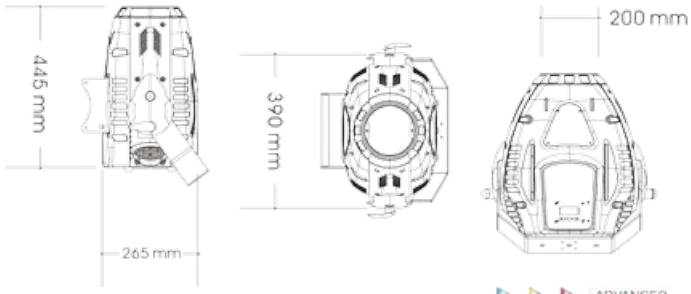

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*800 W*
DMX-control-channels:	*12*
DMX-512-connection:	*3-pin XLR*
Colour-wheel:	*4 dichroic, 2 correction filters, UV-filter + white*
Colour-system:	*CMY colour-mixture*
Dimensions (LxWxH):	*460 x 380 x 385 mm*
Weight:	*27 kg*

Accessories:

GE CSR575/2 SE 95V/575W GX-9,5 1000h	*No. 89107000*
PHILIPS MSR 575/2 95V/575W GX-9.5 1000h	*No. 89107015*
SYLVANIA BA575/2SE NHR 575W GX-9,5 8500K	*No. 89107020*
OSRAM HSR 575/72 95V/575W GX-9.5 1000h	*No. 89107210*
Barndoors for PCC-575	*No. 51840966*
FUTURELIGHT FS-1 Floor Stand for spots	*No. 51840956*
FUTURELIGHT CP-240 controller	*No. 51834265*
Wizard-512 USB DMX software + interface	*No. 51860102*
Wizard-1024 USB DMX software + interface	*No. 51860110*
DMX-terminator DES-3 DMX 3-pin	*No. 51834001*

Barndoors for PCC-250/PCC-500

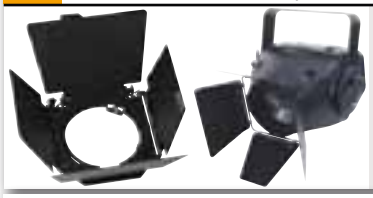

No. 51840955

Barndoors for PCC-575



No. 51840966

Barndoors for PCC-1200

No. 51840980

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

Futurelight

Lighting effects

highlights

FUTURELIGHT PCC-1200 PRO-Colour-Changer

No. 51840975

For 1200 W halogen bulb, G 22
Electronic dimmer

• DMX-controlled operation or stand alone operation with Master/Slave-function • 48 preprogrammed scenes in Program Run for stand alone operation • Number of scenes in Program Run can be changed individually • The scenes in Program Run can be modified via the Control Board or via an external controller and loaded into the memory • 8 built-in programs can be called up via DMX-controller • Sound-controlled via built-in microphone • Lightbeam with 27° radiation angle • Control-Board with 4-digit display and foil-keyboard for adjusting the DMX-starting address, Program, Reset • For bright 1200 W lamp • Colour-wheel 1 with 5 different, dichroic colour-filtres and white • Colour-wheel 2 with 4 different, dichroic colour-filtres, blackout and white • DMX-control via every standard DMX-controller

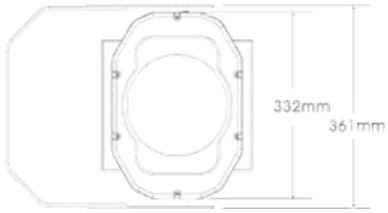



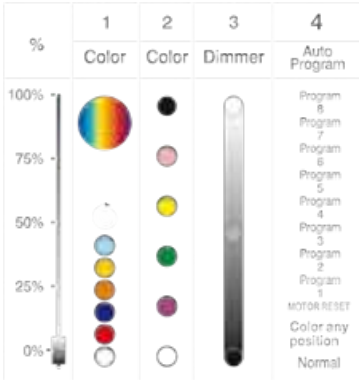

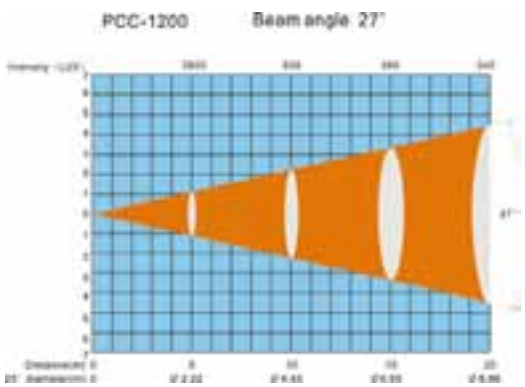

Technical specifications:	
Power supply:	230 V AC, 50 Hz ~
Power consumption:	1300 W
DMX-control-channels:	4
DMX-512-connection:	3-pin XLR
Sound-control:	via built-in microphone
Colour-wheel 1:	5 colours and white
Colour-wheel 2:	4 colours, blackout and white
Dimensions (LxWxH):	470 x 410 x 450 mm
Weight:	18 kg

Accessories:	
GE CP93 240V/1200W G-22 200h 3200K	No. 88463000
OSRAM 64756 CP93 230V/1200W G-22 400h	No. 88463010
Barndoors for PCC-1200	No. 51840980
FUTURELIGHT EX-6/32 controller	No. 51834046
FUTURELIGHT CP-240 controller	No. 51834265
Wizard-512 USB DMX software + interface	No. 51860102
Wizard-1024 USB DMX software + interface	No. 51860110
DMX-terminator DES-3 DMX 3-pin	No. 51834001

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE Little Star, 500W pole-burner

highlights

No. 51806210

Fan projections move at any bass beat around their own axis
In total 10 beams provide a room filling effect
Sound activated via built-in microphone

• Fan projections move at any bass beat around their own axis • In total 10 beams provide a room filling effect • Sound activated via built-in microphone • The response behaviour of the light effect can be regulated by a rotary regulator • Range of usage: small and medium size discos, but also party-rooms or individual entertainers • Ready for connection with power plug • For 500 W R-7-s pole burner

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	550 W
Sound-control:	via built-in microphone
Dimensions (WxDxH):	405 x 440 x 175 mm
Weight:	6 kg

Accessories:

OMNILUX 230V/500W R7s 117mm pole burner	No. 91100400

EUROLITE Tunnel Beam, 800W roundlux

highlights

No. 51806235

Room filling light effect
Sound-controlled via built-in microphone
Ready for connection with power plug

• 10 tunnels (2/3 closed) turn around their own axis and change their direction of movement with any bass beat • Room filling light effect • Range of usage: small and medium size discos, but also party-rooms or individual entertainers • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Ready for connection with power plug • For 800 W Roundlux-lamp

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	900 W
Sound-control:	via built-in microphone
Dimensions (WxDxH):	450 x 400 x 200 mm
Weight:	5 kg

Accessories:

OMNILUX 230V/800W GX-9.5 3200K roundlux	No. 88343005

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — *Lighting effects*

EUROLITE DS-10 pole-burner 100W R-7-S

No. 51812250

highlights

15 lenses with different colors
Sound-controlled via built-in microphone
Low power consumption

• 15 lenses with different colours • One wide fan-effect per lens • Sound-controlled via built-in microphone • For 230 V/100 W R-7-s pole-burner (not included) • Low power consumption • Ready for connection with power-plug • Comes in a 4-colour carton • Ideal for party-rooms, small discotheques or mobile discotheques

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*110 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*290 x 185 x 225 mm*
Weight:	*2 kg*

Accessories:

OMNILUX 230V/100W R7s 78mm pole burner	*No. 91100045*

EUROLITE FF-1 Fog Flower including lamp

No. 51701897

highlights

Ideal for party rooms or small discotheques
Powerful output
With ON/OFF remote control

• Ideal for party-rooms or small discotheques • Powerful output • With ON/OFF remote control • Colourful flower-beams • Three different modes can be selected: static, rotating, sound-controlled • With mounting-bracket • Quality thermostat • Overheat protective switch • For 230 V/100 W lamp • Ready for connection with safety-plug

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*600 W*
Smoke-output:	*approx. 2.3 m*
Warm-up time:	*approx. 4 min.*
Fluid consumption:	*approx. 21 ml/min.*
Output volume:	*approx. 50 m³/min.*
Tank capacity:	*0.25 l*
Dimensions (LxWxH):	*245 x 275 x 210 mm*
Weight:	*4 kg*

Accessories:

OMNILUX JCD 240V/100W GX-6.35 1500h 2800K	*No. 88294905*
EUROLITE Smoke fluid "B", 5L	*No. 51704199*
EUROLITE Smoke fluid "C" standard, 5L	*No. 51704203*
EUROLITE Smoke fluid "P" professional, 1L	*No. 51704209*
EUROLITE Smoke fluid "P" professional, 5L	*No. 51704210*
EUROLITE Smoke fluid "E" extreme, 5L	*No. 51704325*
EUROLITE Smoke fluid "X" extreme A2, 5L	*No. 51704355*
Smoke machine cleaner, 1L	*No. 51704592*
14 fragrances-set for smoke fluid	*No. 51704655*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE TF-5 DMX Flower inclusive lamp

highlights

No. 51785860

Gobo wheel with 13 multi-color gobos
With gobo shake function
Manual focus

• Gobo-wheel with 13 multi-colour gobos and open and coloured mirror • With gobo-shake function • Manual focus • Strobe-effect with 1-5 flashes per second via gobo-wheel • 2 DMX-control-channels required • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Sound-controlled gobowheel and strobe via DMX adjustable • Master/Slave-function • EHJ 24 V/250 W G-6.35 lamp

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W
DMX-control-channels:	2
DMX-512-connection:	3-pin XLR
Sound-control:	via built-in microphone
Flash-rate:	1-5 Hz
Number of gobos:	13 gobos + open
Dimensions (LxWxH):	360 x 280 x 250 mm
Weight:	7.5 kg

Accessories:

GE EHJ A1/223 24V/250W G-6.35 50h	No. 88289000
OMNILUX EHJ 24V/250W G-6.35 50h 3000K	No. 88289005
OSRAM EHJ 64655HLX A1/223 24V/250W G-6.35	No. 88289010
OMNILUX EVC 24V/250W G-6.35 300h	No. 88290005
OSRAM 64657HLX EVC M33 24V/250W G-6.35	No. 88290010
EUROLITE DMX scan control 192 channels	No. 70064525
Wizard-512 USB DMX software + interface	No. 51860102
Wizard-1024 USB DMX software + interface	No. 51860110
DMX-terminator DES-3 DMX 3-pin	No. 51834001

EUROLITE TR-5 DMX Flower inclusive lamp

highlights

No. 51785863

Gobo wheel with 13 multi-color gobos and open
With gobo shake function
Manual focus

• Gobo-wheel with 13 multi-colour gobos and open • With gobo-shake function • Manual focus • Strobe-effect with 1-5 flashes per second via gobo-wheel • 2 DMX-control-channels required • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Sound-controlled gobowheel and strobe via DMX adjustable • Master/Slave-function • EHJ 24 V/250 W G-6.35 lamp

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W
DMX-control-channels:	2
DMX-512-connection:	3-pin XLR
Sound-control:	via built-in microphone
Flash-rate:	1-5 Hz
Number of gobos:	13 gobos + open
Dimensions (LxWxH):	360 x 280 x 250 mm
Weight:	7.5 kg

Accessories:

OMNILUX EHJ 24V/250W G-6.35 50h 3000K	No. 88289005
OSRAM EHJ 64655HLX A1/223 24V/250W G-6.35	No. 88289010
OMNILUX EVC 24V/250W G-6.35 300h	No. 88290005
OSRAM 64657HLX EVC M33 24V/250W G-6.35	No. 88290010
Wizard-512 USB DMX software + interface	No. 51860102
Wizard-1024 USB DMX software + interface	No. 51860110
DMX-terminator DES-3 DMX 3-pin	No. 51834001

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — *Lighting effects*

EUROLITE MF-1 Miniflower

highlights

No. 51808280 .....white
No. 51808282 .....color

White or colorful flower beams
Three different modes can be selected
Sound-control via built-in microphone

• Three different modes can be selected • Static: the flower-effect is only static - ideal in connection with several Miniflowers e. g. as chaser • Rotating: the flower-effects appears as constantly rotating - also in connection with several Miniflowers as chaser • Sound-controlled: the flower-beams change their direction of movement at every bass-beat • Sound-control via built-in microphone • Very compact housing • Ready for connection with safety-plug • Low power consumption • With 12 V/50 W lamp • The ideal effect for party rooms, hotel bars etc. • Delivered in a four-colour carton

Technical specifications white:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*55 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*275 x 160 x 180 mm*
Weight:	*3 kg*

Technical specifications color:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*55 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*245 x 160 x 125 mm*
Weight:	*3 kg*

Accessories:

GE M32 12V/50W GY-6.35 4000h	*No. 88283000*
OMNILUX JC 12V/50W G-6.35 2000h	*No. 88283005*
OSRAM 64440 HALOSTAR 12V/50W GY6.35 2000h	*No. 88283010*
PHILIPS 13102 12V/50W GY-6.35 2000h	*No. 88283015*
GE BRL A1/220 12V/50W G-6.35 50h 3400K	*No. 88283200*
OMNILUX BRL 12V/50W G-6.35 50h 3400K	*No. 88283205*
OSRAM 64610HLX BRL A1/220 12V/50W G-6.35	*No. 88283210*

EUROLITE MF-2 Miniflower color, 230V/100W

highlights

No. 51808289
No. 5180828C.....with strobe function

Colorful flower beams
Three different modes can be selected
Flower effect static and rotating

• Colorful flower-beams • Three different modes can be selected • Static: the flower-effect is only static - ideal in connection with several Miniflowers e. g. as chaser • Rotating: the flower-effects appears as constantly rotating - also in connection with several Miniflowers as chaser • Sound-controlled: the flower-beams change their direction of movement at every bass-beat • Sound-control via built-in microphone • Very compact housing • Ready for connection with safety-plug • Low power consumption • For 230 V/100 W lamp • The ideal effect for party rooms, hotel bars etc. • Delivered in a four-colour carton

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*110 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*185 x 160 x 170 mm*
Weight:	*1.3 kg*

Accessories:

OMNILUX JCD 240V/100W GX-6.35 1500h 2800K	*No. 88294905*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE Moving Flower III, 230V/300W

No. 51808292

highlights

Dichroic color filters for intensive colors
For vertical or horizontal mounting
Low power consumption

• The mirror and the fine flower beams change their direction of movement with every bass-beat • Dichroic colour filters for intensive colours • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary control • For vertical or horizontal mounting • Low power consumption • For 230 V/300 W lamp • Lamp must be ordered separately • Ready for connection with power plug • Ideal for small rooms, bars or party rooms etc. • Delivered in a four-colour carton

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*350 W*
Dimensions:	*580 x 175 x 250 mm*
Weight:	*4.5 kg*

Accessories:

OSRAM 64515 230V/300W GX-6.35 15h	*No. 88296010*
GE A1/249 240V/300W G-6.35 50h	*No. 88296100*
OMNILUX 230V/300W GX-6.35 75h 3200K	*No. 88296105*
OSRAM 64516 240V/300W GX-6.35 75h	*No. 88296110*

EUROLITE GF-10 Gobo Flower EFP 12V/100W

No. 51808304

highlights

Reflector with 20 white mirrors
Gobo wheel with 18 colored gobos
Sound-controlled via built-in microphone

• Reflector with 20 white mirrors • Gobo-wheel with 18 colored gobos • Sound-controlled via built-in microphone • For EFP 12 V/100 W lamp

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*140 W*
Dimensions (LxWxH):	*230 x 260 x 170 mm*
Weight:	*5 kg*

Accessories:

OMNILUX EFP 12V/100W GZ-6.35 50h	*No. 88285005*
OSRAM EFP 64627HLX 12V/100W GZ6.35	*No. 88285010*
OMNILUX EFP 12V/100W GZ-6.35 500h	*No. 88285105*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE Gobo Flower I, ELC 24V/250W

highlights

No. 51808306

Multi-color flower effect
Sound-controlled via built-in microphone
Microphone sensitivity adjustable via rotary control

• Multi-colour flower effect with 20 beams and 8 different gobos • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Intervals of the gobo change adjustable via Gobo-Change-control • Ready for connection with safety-plug • For 24 V/250 W ELC-lamp • Easy lamp-exchange via service-lid • Ideal for mobile use, party-rooms and small discotheques

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	350 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	330 x 350 x 145 mm
Weight:	9 kg

Accessories:

GE ELC 24V/250W GX-5.3 50h w. 50mm refl.	No. 88264000
OMNILUX ELC 24V/250W GX-5.3 50h 50mm refl	No. 88264005
OSRAM ELC 64653HLX A1/259 24V/250W GX-5.3	No. 88264010
PHILIPS ELC 24V/250W GX-5.3 50h 50mm refl	No. 88264015
GE ELC 24V/250W GX-5,3 500h 50mm Refl.	No. 88264100
OMNILUX ELC 24V/250W GX-5.3 500h 50mm ref	No. 88264105
PHILIPS ELC 24V/250W GX-5.3 500h 50mm ref	No. 88264115
PHILIPS ELC 24V/250W GX-5.3 1000h	No. 88264215

EUROLITE MF-5 Color 230V/300W

highlights

No. 51808919

Dichroic color filters for brilliant colors
Sound-controlled via built-in microphone
For small discotheques, bars or party rooms

• The flower-beams change their direction with every bass-beat • Dichroic colour-filters for brilliant colours • Sound-controlled via built-in microphone • Switching of the lamp and sound-control adjustable via 3-step mode-selector • For small discotheques, bars or party rooms • Thousandfold proved technology • Ready for connection with safety-plug • For one 230 V/300 W lamp

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	350 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	280 x 230 x 155 mm
Weight:	3 kg

Accessories:

OSRAM 64515 230V/300W GX-6.35 15h	No. 88296010
GE A1/249 240V/300W G-6.35 50h	No. 88296100
OMNILUX 230V/300W GX-6.35 75h 3200K	No. 88296105
OSRAM 64516 240V/300W GX-6.35 75h	No. 88296110
EUROLITE TH-50H Theatre hook black	No. 58000654

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE DMF-5 Duo, 2x 230V/300W

No. 51808928

highlights

Double effect with white/color
Dichroic color filters for brilliant colors
Sound-controlled via built-in microphone

• Double effect with white/color • The flower beams change their direction with every bass-beat • Dichroic color filters for brilliant colours • Sound-controlled via built-in microphone • For small discotheques, bars or party rooms • Thousandfold proved technology • Ready for connection with safety-plug • 230 V/300 W lamp already installed

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*610 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*295 x 270 x 185 mm*
Weight:	*3 kg*

Accessories:

OSRAM 64515 230V/300W GX-6.35 15h	*No. 88296010*
GE A1/249 240V/300W G-6.35 50h	*No. 88296100*
OMNILUX 230V/300W GX-6.35 75h 3200K	*No. 88296105*
OSRAM 64516 240V/300W GX-6.35 75h	*No. 88296110*

EUROLITE BR-100 effect-light 12V/100W

No. 51812505

highlights

Sound controlled mirror deflection
Sound control via built-in microphone

• Sound controlled mirror deflection • The mirror and the flower effect moves with every bass beat • Brilliant flower beams • Sound control via built-in microphone • Value for money • Low power consumption • For 12 V/100 W lamp • Ready for being connected with power plug • Ideal for party rooms, small discotheques or mobile discotheques • Comes in a 4-color carton

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*115 W*
Sound-control:	*Via built-in microphone*
Dimensions (LxWxH):	*200 x 265 x 245 mm*
Weight:	*2.7 kg*

Accessories:

GE EVA M28 12V/100W GY-6.35 2000h	*No. 88284000*
OMNILUX FCR 12V/100W G-6.35 2000h 2900K	*No. 88284005*
PHILIPS 13100 12V/100W GY-6.35 2000h	*No. 88284015*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE MF-9 for 12V/100W

highlights

No. 51812575

Sound-controlled mirror deflection
Brilliant flower beams
Sound control via built-in microphone

• Sound-controlled mirror deflection • The mirror and the flower-effect moves with every bass-beat • Brilliant flower beams • Sound-control via built-in microphone • Value for money • Low power consumption • For 12 V/100 W lamp • Ready for being connected with power-plug • Ideal for party-rooms, small discotheques or mobile discotheques • Comes in a 4-colour carton

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*110 W*
Sound-control:	*via built-in microphone*
Dimensions:	*415 x 180 x 130 mm*
Weight:	*5 kg*

Accessories:

GE EVA M28 12V/100W GY-6.35 2000h	*No. 88284000*
OMNILUX FCR 12V/100W G-6.35 2000h 2900K	*No. 88284005*
PHILIPS 13100 12V/100W GY-6.35 2000h	*No. 88284015*

EUROLITE LED D-12 RGBA

highlights

No. 51918509

In the familiar D-10 Derby housing
Luminance like 300 W Derby effect
Beams identical to halogene version via amber LED

• Two beams exit from every lens, perform a circular movement and change the direction of movement at every bass-beat • 2 lens rows with a total of 12 glass-lenses provide for a room-filling effect • Sound-controlled via built-in microphone • The color combinations change constantly, thanks to the internal program with a continuous loop • Microphone-sensitivity adjustable via rotary-control • Easy installation via mounting-bracket • For party rooms, small discos or mobile DJs • Equipped with 3 x 3W LEDs: red, green, blue; and 1 x 1W LED: amber • Ready for connection with power cord and safety-plug • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*35 W*
Sound-control:	*via built-in microphone*
Number of LEDs:	*3 x 3W LEDs: red, green, blue; 1 x 1W LED: amber*
Beam angle:	*150°*
Dimensions (LxWxH):	*270 x 300 x 230 mm*
Weight:	*3 kg*

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	*No. 58000653*
EUROLITE TH-90 Theatre hook for 50mm pipe	*No. 58000720*
EUROLITE TH-200 Theatre hook max. 200 kg	*No. 58000740*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE LED FE-18 Flower effect

No. 51918530

highlights

Colorful flower beams
Sound-control via built-in microphone
Very compact housing

• Colourful flower-beams • The flower-beams change their direction of movement at every bass-beat • Sound-control via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Very compact housing • Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation • The ideal effect for party rooms, hotel bars etc. • Delivered in a four-colour carton

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W
Number of LEDs:	18
Sound-control:	via built-in microphone
Dimensions (LxWxH):	230 x 190 x 175 mm
Weight:	2 kg

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	No. 58000653
EUROLITE TH-90 Theatre hook for 50mm pipe	No. 58000720
EUROLITE TH-151 Theatre hook max. 80 kg	No. 58000736
EUROLITE TH-200 Theatre hook max. 200 kg	No. 58000740

EUROLITE LED FE-20

No. 51918535

highlights

Colorful flower beams (unlike FE-18)
Sound-control via built-in microphone
Very compact housing

• Thanks to the flexible reflector, the flower-beams change their direction of movement at every bass-beat • Sound-control via built-in microphone • Speed of the program sequence can be adjusted by rotary control • Very compact housing • Ready for connection with power cord and safety-plug • Innumerable uses: for bands, stages or solo entertainers • Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	12 W
Sound-control:	via built-in microphone
Number of LEDs:	18
Dimensions (LxWxH):	230 x 195 x 170 mm
Weight:	1.75 kg

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE LED MAT-64 DMX

No. 51918550

highlights

64 RGB-LEDs
DMX control
LED projector with RGB patterns
Ready for connection with safety plug

• Creates various RGB patterns via LED matrix • Equipped with 64 LEDs: 32 x red, 20 x blue, 12 x green • DMX-controlled operation or stand alone operation with Master/Slave-function • DMX-control via every standard DMX-controller • Sound-controlled via built-in microphone • Patterns and speed and adjustable via dip switches • Ready for connection with safety-plug • Rugged housing with mounting bracket • Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	23 W
DMX-control-channels:	3
DMX-512-connection:	3-pin XLR
Sound-control:	via built-in microphone
Number of LEDs:	64
Dimensions (LxWxH):	280 x 240 x 225 mm
Weight:	3.4 kg

EUROLITE LED MAT-192 DMX

No. 51918555

highlights

Creates various RGB patterns via LED matrixes
Equipped with 192 x 5 mm LEDs: 72 red, 48 green, 72 blue
Rugged housing with mounting bracket

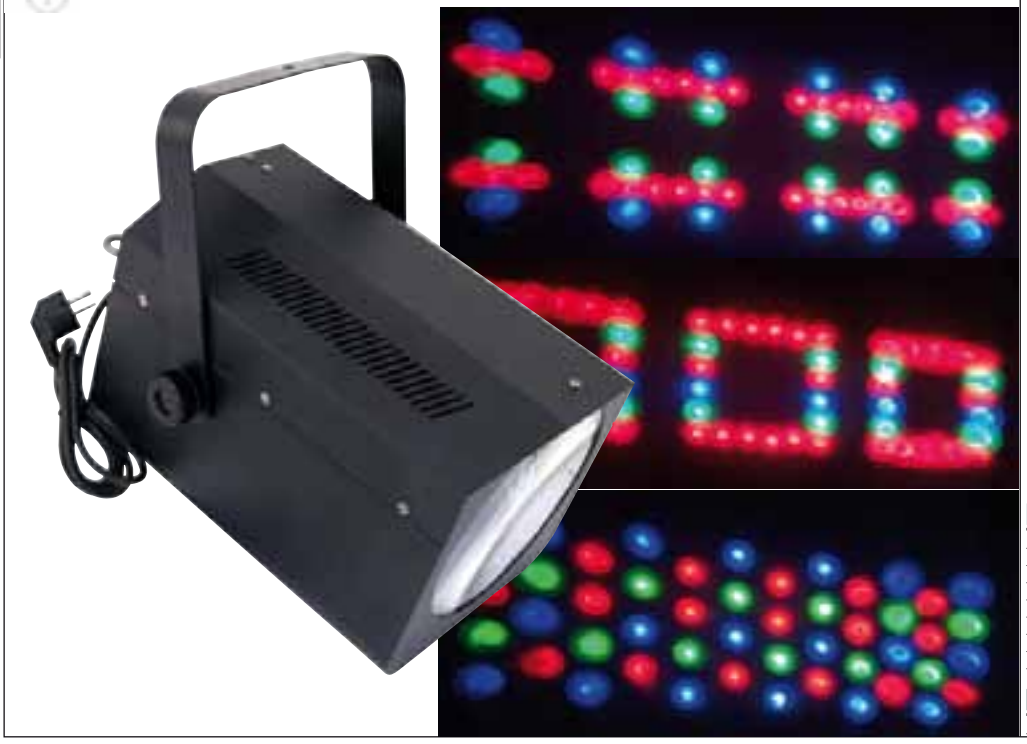

• Creates various RGB patterns via LED matrixes • Equipped with 192 5mm LEDs: 72 red, 48 green, 72 blue • DMX-controlled operation or stand alone operation with Master/Slave-function • Control via IR remote or any standard 512-DMX-controller • 16 internal programs • 10 internal phrases to choose from, or create 5 new ones (with IR remote only) • 4-button LED display • Sound-control via built-in microphone • Ready for connection with power cord and safety-plug • Rugged housing with mounting bracket • Perfect on stages, in discotheques, theatres even shops and hotels • Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	max. 55 W
DMX-control-channels:	3
DMX-512-connection:	3-pin XLR
Number of LEDs:	192 5mm (72 red, 48 green, 72 blue)
Beam angle of LEDs:	25°
Dimensions (LxWxH):	340 x 290 x 330 mm
Weight:	5.5 kg

Accessories:

EUROLITE IR remote/receiver for MAT-192	No. 51918556

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

highlights

FUTURELIGHT DJ-LED CF-100

No. 51837505

Creates 16 various RGB patterns
Gobo rotation
Strobe effect with adjustable speed

• Creates 16 various RGB patterns (gobos) via LED matrix • Gobo rotation • Strobe effect with adjustable speed • Equipped with 40 LEDs: 16 x red, 12 x blue, 12 x green • 100 000 hours LED life • Manual focus • ¼" jack-socket for remote control • Fuzzy-Sound-Control: program continues automatically during periods without music or bass-beat • DMX-controlled operation or stand alone operation with Master/Slave-function (up to 4 slaves) • Blackout, Gobos and Auto/Manual Mode applicable in Stand Alone mode via optional FUTURELIGHT Easy-4 remote control • Sound-controlled via built-in microphone • Control-Board with 4-digit display • DMX-control via every standard DMX-controller

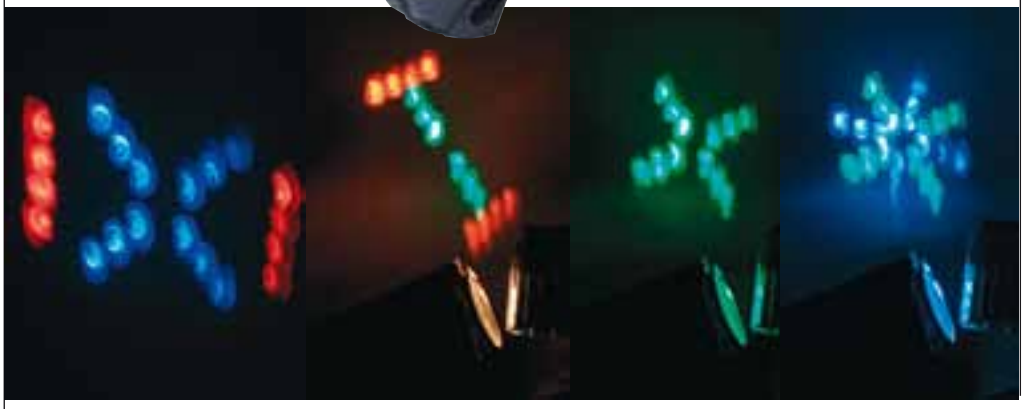

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W
DMX-control-channels:	3
DMX-512-connection:	3-pin XLR
Sound-control:	via built-in microphone
Flash-rate:	18 Hz
Number of LEDs:	40
Dimensions (LxWxH):	220 x 210 x 205 mm
Weight:	2.4 kg

Accessories:

FUTURELIGHT EX-6/32 controller	No. 51834046
FUTURELIGHT CP-240 controller	No. 51834265
Wizard-512 USB DMX software + interface	No. 51860102
Wizard-1024 USB DMX software + interface	No. 51860110
FUTURELIGHT Easy-4 remote control	No. 51834014
DMX-terminator DES-3 DMX 3-pin	No. 51834001

FUTURELIGHT SEC-03 Signal extension cord

No. 51841410

FUTURELIGHT PEC-03 Power extension cord

No. 51841411

FUTURELIGHT PC-03 Power cord

No. 51841412

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

FUTURELIGHT DJ-LED QCF-400

No. 51837508

highlights

LED matrix creates 21 different "spin patterns", 10 different "figure patterns" and 26 "letter patterns"
Gobo rotation
Equipped with 256 LEDs: 128 x red, 48 x green, 80 x blue

• Creates 21 different "spin patterns", 10 different "figure patterns" and 26 "letter patterns" via LED matrix • Gobo rotation • Strobe effect with adjustable speed • Equipped with 256 LEDs: 128 x red, 48 x green, 80 x blue • 100 000 hours LED life • ¼" jack-socket for remote control • Fuzzy-Sound-Control: program continues automatically during periods without music or bass-beat • DMX-controlled operation or stand alone operation with Master/Slave-function • Blackout, Gobos and Auto/Manual Mode applicable in Stand Alone mode via optional FUTURELIGHT Easy-5 remote control • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Control-Board with 4-digit display • DMX-control via every standard DMX-controller

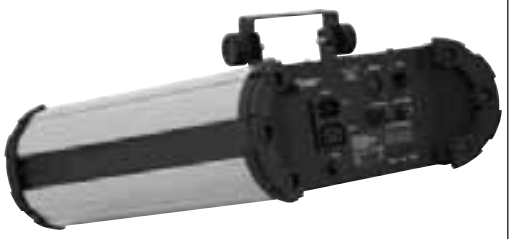

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*60 W*
DMX-control-channels:	*7*
DMX-512-connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Flash-rate:	*18 Hz*
Number of LEDs:	*256 (64 per lense)*
Dimensions (LxWxH):	*370 x 570 x 190 mm*
Weight:	*5.5 kg*

Accessories:

FUTURELIGHT Easy-5 remote control	*No. 51834013*

FUTURELIGHT Easy-1 remote control

No. 51834010

highlights

For controlling the blackout in Stand Alone mode
For all devices with additional Blackout socket
10 m connection cable with stereo jack

• For controlling the blackout in Stand Alone-mode • For all devices with additional Blackout-socket • 10 m connection cable with stereo jack

FUTURELIGHT Easy-2 remote control

No. 51834011

highlights

For controlling the blackout in Stand Alone mode
For all devices with additional Blackout socket
10 m connection cable with mono jack

• For controlling the blackout in Stand Alone-mode • For all devices with additional Blackout-socket • 10 m connection cable with mono jack

FUTURELIGHT Easy-5 remote control

No. 51834013

highlights

Suitable for FUTURELIGHT DJ-LED QCF-400
For controlling the blackout in Stand Alone mode
10 m connection cable with stereo jack

• Suitable for FUTURELIGHT DJ-LED QCF-400 • For controlling the blackout in Stand Alone-mode • For switching the gobos and the Auto/Manual mode. In Auto Mode, the gobos are switched sound-controlled. In Manual Mode, the gobos are switched via remote control • 10 m connection cable with stereo jack

FUTURELIGHT Easy-4 remote control

No. 51834014

highlights

Suitable for FUTURELIGHT DJ-LED CY-100, FUTURELIGHT DJ-LED Scan 100, FUTURELIGHT DJ-LED CF-100
For controlling the blackout in Stand Alone mode
10 m connection cable with stereo jack

• Suitable for FUTURELIGHT DJ-LED CY-100, FUTURELIGHT DJ-LED Scan 100, FUTURELIGHT DJ-LED CF-100 • For controlling the blackout in Stand Alone-mode • For switching the gobos and the Auto/Manual mode. In Auto Mode, the gobos are switched sound-controlled. In Manual Mode, the gobos are switched via remote control • 10 m connection cable with stereo jack

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE LED DMF-4 RGB Flower Effect

No. 51918560

highlights

94 x 5mm LED
Innumerable uses
Particularly bright illuminating power

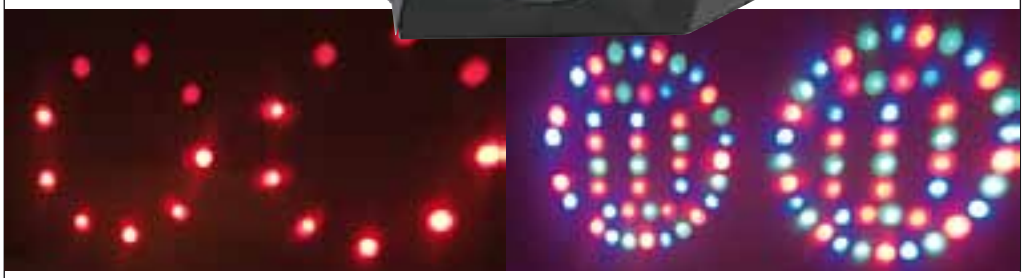

• The flower-beams change their direction with every bass-beat • Sound-controlled via built-in microphone • Innumerable uses • Perfect in public places, main halls, stages, lounges • Ready for connection with power cord and safety-plug • Particularly bright illuminating power of the 5mm LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*23 W*
Sound-control:	*über eingebautes Mikrofon*
Number of 5mm LEDs:	*94*
Dimensions (LxWxH):	*280 x 280 x 185 mm*
Weight:	*2 kg*

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	*No. 58000653*
EUROLITE TH-90 Theatre hook for 50mm pipe	*No. 58000720*
EUROLITE TH-200 Theatre hook max. 200 kg	*No. 58000740*

EUROLITE LED MF-3 RGB Flower effect

No. 51918580

highlights

60 RGB-LEDs
Compact RGB flower effect
Auto mode adjustable
Strobe effect adjustable

• Sound-control, auto mode and strobe effect adjustable via 3-step mode-selector • Master/Slave function • Rugged compact housing in a handsome design • Ready for connection with power cord and safety-plug • Ideal for bands, stages, discos or solo entertainers • Mounting bracket for installation on a trussing system included • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*10 W*
Number of LEDs:	*60*
Dimensions (LxWxH):	*170 x 190 x 160 mm*
Weight:	*1.7 kg*

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	*No. 58000653*
EUROLITE TH-90 Theatre hook for 50mm pipe	*No. 58000720*
EUROLITE TH-200 Theatre hook max. 200 kg	*No. 58000740*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE LED FE-3x1 Flower effect

highlights

No. 51918600

Colorful flower beams
Very compact housing
Red, green and blue high-power 1 W LEDs

• Colourful flower-beams - 7 possible colour combinations • The flower-beams change their direction of movement at every bass-beat • Sound-control via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Very compact housing • Red, green and blue high-power 1 W LEDs • Advantages of high-power LED-technology: extreme light output, extremely long life, low power consumption, defacto maintenance free • Ready for connection with safety-plug • The ideal effect for party rooms, hotel bars etc.

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	15 W
Number of LEDs:	3
Type of LEDs:	1 W, high-power
Sound-control:	via built-in microphone
Dimensions (LxWxH):	230 x 185 x 175 mm
Weight:	2 kg

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	No. 58000653
EUROLITE TH-90 Theatre hook for 50mm pipe	No. 58000720
EUROLITE TH-200 Theatre hook max. 200 kg	No. 58000740

EUROLITE LED MF-6 white Flower effect DMX

highlights

No. 51918608

Classic flower effects - now with LEDs
Luminance like 300 W flower effects, e.g. EUROLITE MF-5
With DMX connection

• DMX-512 control via regular DMX-controller (occupies 4 channels) • Sound-control via built-in microphone • Speed and strobe effect adjustable via dip switches • Auto mode • Internal programs • Master/Slave function • Rugged compact housing in a beautiful design • Ready for connection with power cord and safety-plug • Ideal for bands, stages or solo entertainers • Perfect in public places, main halls, lounges • Mounting bracket for installation on a trussing system included • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	12 W
Number of DMX channels:	4
DMX-512 connection:	3-pin XLR
Sound-control:	via built-in microphone
Number of LEDs:	27 (white)
Beam angle:	15°
Dimensions (LxWxH):	340 x 235 x 260 mm
Weight:	3.4 kg

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

highlights

EUROLITE LED MF-6 RGB Flower effect DMX

No. 51918610

Classic flower effects - now with LEDs
Luminance like 300 W flower effects, e.g. EUROLITE MF-5
With DMX connection

• DMX-512 control via regular DMX-controller (occupies 6 channels) • Sound control via built-in microphone • Color-change speed and strobe effect adjustable via dip switches • Auto mode • Internal programs • Master/Slave function • Rugged compact housing in a beautiful design • Ready for connection with power cord and safety-plug • Ideal for bands, stages or solo entertainers • Perfect in public places, main halls, lounges • Mounting bracket for installation on a trussing system included • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	14 W
Number of DMX channels:	6
DMX-512 connection:	3-pin XLR
Sound-control:	via built-in microphone
Number of LEDs:	27 (9 red, 9 green, 9 blue)
Beam angle:	15°
Dimensions (LxWxH):	340 x 235 x 260 mm
Weight:	3.4 kg

LIGHTING FOR EFFECT
The source of light.
Made in Germany
BLV
USHIO Group
Ultralife, Scala, Topspot and Colorlite lamps
BLV Ultralife, Scala, Topspot and Colorlite lamps are a family of high-pressure discharge light sources with a compact arc. They are metal halide lamps with excellent performance, specially designed for a wide variety of audio-visual applications.
BLV Licht- und Vakuumtechnik GmbH • Phone: +49 (0) 80 94/906-0 • E-Mail: sales@blv-licht.de • Internet: www.blv-licht.com

eurolite — *Lighting effects*

EUROLITE LED FX PAR-100 RGB DMX

No. 51918640

highlights

93 LEDs
15 built-in programs
LED flower in with PAR housing

• Equipped with 93 LEDs: 33 x red, 30 x blue, 30 x green • DMX-controlled operation or stand alone operation with Master/Slave-function • DMX-control via every standard DMX-controller • 15 internal programs • Fresnel foil in the color filter frame transforms the colorful light beams into extraordinary flower effects • Patterns and speed are adjustable via dip switches • Sound-control via built-in microphone • Ready for connection with power cord and safety-plug • Rugged housing with mounting bracket • Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*20 W*
DMX-control-channels:	*3*
DMX-512-connection:	*3-pin XLR*
Number of LEDs:	*93 x 10mm*
Beam angle:	*20°*
Dimensions (LxWxH):	*355 x 250 x 295 mm*
Weight:	*2 kg*

EUROLITE LED FX-250 RGBW DMX

No. 51918650

highlights

Equipped with 156 x 10 mm LEDs
15 internal programs
Rugged housing with mounting bracket

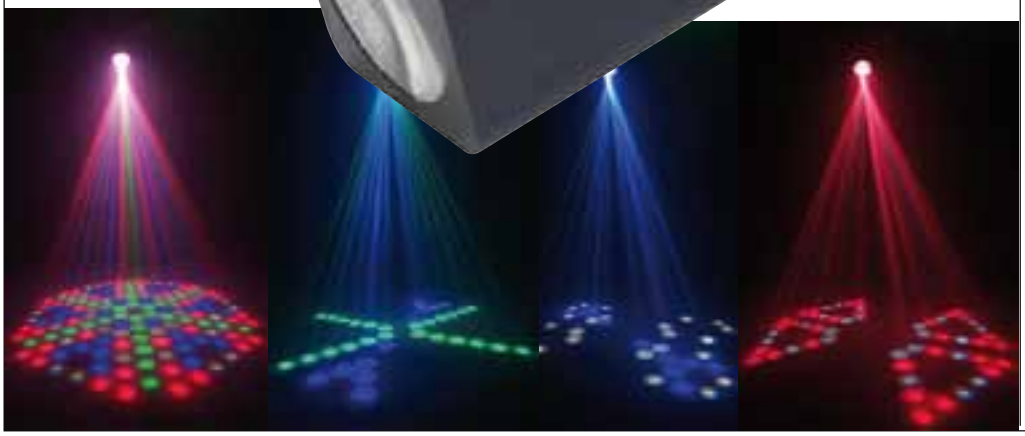

• Equipped with 156 10mm LEDs: 48 x red, 36 x blue, 36 x green, 36 x white • DMX-controlled operation or stand alone operation with Master/Slave-function • DMX-control via every standard DMX-controller • 15 internal programs • 6 LED grouping arrangements produce dynamic lighting effects • These brilliant light beams resemble those of lasers, yet are much more impressive! • Patterns and speed are adjustable via dip switches • Sound-control via built-in microphone • Ready for connection with power cord and safety-plug • Rugged housing with mounting bracket • Perfect on stages, in discotheques, theatres even shops and hotels • Advantages of LED-technology: extremely long life, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*20 W*
DMX-control-channels:	*6*
DMX-512-connection:	*3-pin XLR*
Number of LEDs:	*156 (48 red, 36 green, 36 blue, 36 white)*
Beam angle of RGB LEDs:	*20°*
Beam angle of white LEDs:	*30°*
Dimensions (LxWxH):	*330 x 230 x 230 mm*
Weight:	*5 kg*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE LED FX-300 RGB DMX

No. 51918655

highlights

Light output via Fresnel lens
Equipped with 469 LEDs
Patterns and speed are adjustable via DIP switches

• Light output via Fresnel lens • Equipped with 469 LEDs (5 mm), red 280, green 63, blue 126 • 7 LED-groups are switched without any noise and create the effects • DMX-controlled operation or stand alone operation with Master/Slave-function • DMX-control via every standard DMX-controller • 1 internal program • Patterns and speed are adjustable via DIP-switches • Sound-control via built-in microphone • Ready for connection with power cord and safety-plug • Rugged housing with mounting bracket • Perfect on stages, in discotheques, theatres even shops and hotels

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*80 W*
Beam angle:	*approx. 65°*
Number of LEDs:	*469*
DMX-control-channels:	*9*
DMX-512-connection:	*3-pin XLR*
Dimensions (LxWxH):	*320 x 335 x 375 mm*
Weight:	*7 kg*

EUROLITE LED TWS-10 RGB

No. 51918680

highlights

Sound-controlled mirror deflection
Brilliant flower beams
Innumerable uses

• Sound-controlled mirror deflection • The mirror and the flower-effect changes direction with every bass-beat • Brilliant flower beams • Sound-controlled via built-in microphone • Innumerable uses • Perfect in public places, main halls, stages, lounges • Ready for connection with power cord and safety-plug • Particularly bright illuminating power of the 5mm LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*16 W*
Sound-control:	*via built-in microphone*
Number of 5mm LEDs:	*52*
Beam angle:	*15°*
Dimensions (LxWxH):	*415 x 300 x 190 mm*
Weight:	*4.4 kg*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE TG-5 DMX Gobo changer inklusive lamp

highlights

No. 51785855

Color wheel with 11 dichroic color filters and white
With gobo shake function
Manual focus

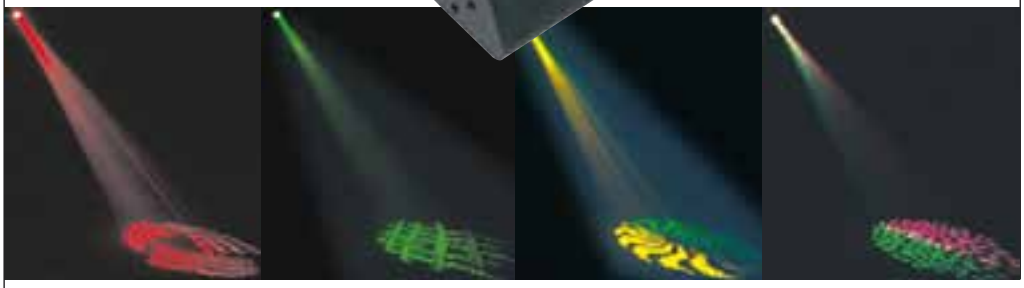

• Colour-wheel with 11 dichroic colour-filtres and white • Rainbow-effect with adjustable speed in both directions • Gobo-wheel with 9 gobos and open • With gobo-shake function • Manual focus • Strobe-effect with 1-5 flashes per second via gobo-wheel • Electronic dimmer • 3 DMX-control-channels required • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Sound-controlled colour-wheel, gobowheel and strobe via DMX adjustable • Master/Slave-function • EHJ 24 V/250 W G-6.35 lamp included in the delivery

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W
DMX-control-channels:	3
DMX-512-connection:	3-pin XLR
Sound-control:	via built-in microphone
Flash-rate:	1-5 Hz
Number of colours:	11 dichroic + white
Number of gobos:	9 gobos + open
Dimensions (LxWxH):	320 x 280 x 280 mm
Weight:	9 kg

Accessories:

OMNILUX EHJ 24V/250W G-6.35 50h 3000K	No. 88289005
OSRAM EHJ 64655HLX A1/223 24V/250W G-6.35	No. 88289010
OMNILUX EVC 24V/250W G-6.35 300h	No. 88290005
OSRAM 64657HLX EVC M33 24V/250W G-6.35	No. 88290010
EUROLITE DMX scan control 192 channels	No. 70064525
Wizard-512 USB DMX software + interface	No. 51860102
Wizard-1024 USB DMX software + interface	No. 51860110
DMX-terminator DES-3 DMX 3-pin	No. 51834001

Rotor 4 arms for 4 x PAR-36

highlights

No. 50901650

The light rays are swirled with approx. 20 RPM through the air
High value motor
The inclination angle of the lamp heads can be adjusted

• Reliable construction • The light rays are swirled with approx. 20 RPM through the air • High value motor • The inclination angle of the lamp heads can be adjusted • Color caps or color foils can be attached in front • Robust, plastic covered steel plate housing • Standing or hanging mounting possible • Built-in transformer • Low-priced lamps • For bright PAR 36 lamps

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	160 W
Dimensions (WxDxH):	545 x 545 x 350 mm
Weight:	5 kg

Accessories:

OMNILUX PAR-36 6.4V/30W G53 VNSP 200h	No. 88061005
GE 4515 PAR-36 6,4V/30W VNSP 100h	No. 88061000

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

Rotor 6 arms for 6 x PAR-36

No. 50901652

highlights

The light rays are swirled with approx. 20 RPM through the air
High value motor
The inclination of the lamp heads is adjustable

• Reliable construction • The light rays are swirled with approx. 20 RPM through the air • High value motor • The inclination of the lamp heads is adjustable • Color caps or color foils can be attached in front • Robust, plastic covered steel plate housing • Standing or hanging mounting possible • Built-in transformer • Low-priced lamps • For bright PAR 36 lamps

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*220 W*
Dimensions (WxDxH):	*555 x 555 x 350 mm*
Weight:	*7 kg*

Accessories:

GE 4515 PAR-36 6,4V/30W VNSP 100h	*No. 88061000*
OMNILUX PAR-36 6.4V/30W G53 VNSP 200h	*No. 88061005*

EUROLITE Rotor 8 arms for 8 x PAR-36

No. 50901654

highlights

The light rays are swirled with approx. 20 RPM through the air
High value motor
The inclination of the lamp heads is adjustable

• Reliable construction • The light rays are swirled with approx. 20 RPM through the air • High value motor • The inclination of the lamp heads is adjustable • Color caps or color foils can be attached in front • Robust, plastic covered steel plate housing • Standing or hanging mounting possible • Built-in transformer • Low-priced lamps • For bright PAR 36 lamps

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*280 W*
Dimensions (WxDxH):	*585 x 585 x 350 mm*
Weight:	*9 kg*

Accessories:

GE 4515 PAR-36 6,4V/30W VNSP 100h	*No. 88061000*
OMNILUX PAR-36 6.4V/30W G53 VNSP 200h	*No. 88061005*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE U-1A, 230V/150W

No. 50905005

highlights

50 rotations per minute
With high quality rotary motor
Delivery in a four-color box

• The light-beams are thrown into the room via 16 differently-coloured lenses • 50 rotations per minute • The rotating disk generates a high dynamic in the movement • With high quality rotary motor • Delivery in a four-colour box • Standing or hanging mounting possible • Ready for being connected with power plug • The 230 V/150 W lamp generates a light output which cannot be overlooked

Technical specifications:	
Power supply:	230 V AC, 50 Hz ~
Power consumption:	160 W
Dimensions (LxWxH):	270 x 270 x 250 mm
Weight:	2 kg

Accessories:	
OMNILUX 230V/150W GX-6.35 15h	No. 88295005
OSRAM 64502 230V/150W GX-6.35 25h	No. 88295010

EUROLITE B-15, 230V/300W

No. 50906680

highlights

Especially beautiful if used with smoke
Ideal for hanging installation
Ready for being connected with power plug

• Countless fine beams are projected via little holes • The slow rotation of the ball body generates a beautiful effect • Especially beautiful if used with smoke • For hanging installation only • Ready for being connected with power plug • 230 V/300 W lamp included • Delivered in a 4-colour carton

Technical specifications:	
Power supply:	230 V AC, 50 Hz ~
Power consumption:	300 W
Rotation speed:	15 RPM
Dimensions:	220 x 220 x 270 mm
Weight:	1.5 kg

Accessories:	
OMNILUX 230V/300W GX-6.35 75h 3200K	No. 88296105
OSRAM 64515 230V/300W GX-6.35 15h	No. 88296010
OSRAM 64516 240V/300W GX-6.35 75h	No. 88296110

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE B-19/Single Ball, 230V/300W

No. 50907135

highlights

Bright, intensive colors
Suitable for suspended mounting
Ready for connection with power plug

• The ball housing rotates around its own axis • Via 15 lenses, beams of different colours are thrown into the room • Bright, intensive colours • Suitable for suspended mounting • Ready for connection with power plug • 230 V/300 W lamp included • Comes in a 4-colour-carton

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*350 W*
Rotation speed:	*18 RPM*
Dimensions:	*220 x 220 x 300 mm*
Weight:	*2 kg*

Accessories:

OMNILUX 230V/300W GX-6.35 75h 3200K	*No. 88296105*
OSRAM 64516 240V/300W GX-6.35 75h	*No. 88296110*
OSRAM 64515 230V/300W GX-6.35 15h	*No. 88296010*

EUROLITE B-20/Double Ball, 2 x 120V/300W

No. 50907138

highlights

Brilliant, intensive colors
Hanging or standing installation possible
High-quality motor

• Two beam-balls rotate around their own axis plus around the effect's main axis • 24 beams are thrown whirlwind-like through the room • Brilliant, intensive colours • Hanging or standing installation possible • High-quality motor • When smoke is used, this effect becomes especially attractive • Easy installation • Ready for connection with safety-plug • Delivered in a four-colour carton • Ideal for mobile operation, party-rooms and small discotheques • Two 120 V/300 W lamps included

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*650 W*
Rotation-speed:	
Around main axle:	*approx. 25 RPM*
Around ball-axle:	*approx. 30 RPM*
Dimensions (LxWxH):	*445 x 175 x 320 mm*
Weight:	*4.5 kg*

Accessories:

OMNILUX 120V/300W GX-6.35 75h 3200K	*No. 88294005*
OSRAM 64514 120V/300W GX-6.35 75h	*No. 88294010*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE Double Ball, 2 x 24V/150W

highlights

No. 50907140

Brilliant, intensive colors
Hanging or standing installation possible
High-quality motor

• Two beam-balls rotate around their own axis plus around the effect's main axis • 24 beams are thrown whirlwind-like through the room • Brilliant, intensive colours • Hanging or standing installation possible • High-quality motor • When smoke is used, this effect becomes especially attractive • Easy installation • Ready for connection with safety-plug • Delivered in a four-colour carton • Ideal for mobile operation, party-rooms and small discotheques • For two inexpensive 24 V/50 W lamps • Lamps have to be ordered separately

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*350 W*
Rotation-speed:	
Around main axle:	*approx. 25 RPM*
Around ball-axle:	*approx. 30 RPM*
Dimensions (LxWxH):	*470 x 175 x 315 mm*
Weight:	*8 kg*

Accessories:

OMNILUX FCS 24V/150W G-6.35 50h 3300K	*No. 88288005*
OSRAM 64640 HLX 24V/150W G-6,35 50h	*No. 88288010*

EUROLITE D-10/Derby "S" for 2x120V/300W

highlights

No. 51806217

Sound-controlled via built-in microphone
2 lens rows with 16 differently colored glass lenses
Ready for connection with safety plug

• Two beams exit from every lens, perform a circular movement and change the direction of movement at every bass-beat • 2 lens rows with 16 differently coloured glass-lenses • In total 32 beams provide a room-filling effect • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Easy installation via mounting-bracket • For party rooms, small discos or mobile DJs • Ready for connection with safety-plug • Easy lamp-exchange via service-lid • Two 120 V/300 W lamps included in the delivery

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*560 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*345 x 275 x 210 mm*
Weight:	*3.5 kg*

Accessories:

OMNILUX 120V/300W GX-6.35 75h 3200K	*No. 88294005*
OSRAM 64514 120V/300W GX-6.35 75h	*No. 88294010*
PHILIPS 7010 120V/300W GX-6.35 150h	*No. 88294015*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE D-16/Derby "C", 2 x 120V/300W

No. 51806221

highlights

Easy installation via mounting bracket
In total 20 beams provide a room-filling effect
Very high light output

• Two beams exit from every lens, perform a circular movement and change the direction of movement at every bass-beat • 1 row of lenses with 10 differently coloured glass-lenses • In total 20 beams provide a room-filling effect • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Easy installation via mounting-bracket • Thousandfold proved effect • Very high light output • For party rooms, small discos or mobile DJs • Delivery in a four-colour carton • Ready for connection with safety-plug • Easy lamp-exchange via service-lid • Two 120 V/300 W lamps included

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	650 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	385 x 430 x 310 mm
Weight:	6.5 kg

Accessories:

OMNILUX 115-120V/150W GX-6.35 25h 3200K	No. 88293005
OSRAM 64501 115-120V/150W GX-6.35 25h	No. 88293010
OMNILUX 120V/300W GX-6.35 75h 3200K	No. 88294005
OSRAM 64514 120V/300W GX-6.35 75h	No. 88294010
PHILIPS 7010 120V/300W GX-6.35 150h	No. 88294015

EUROLITE D-16E/Derby "EC", 2 x 120V/300W

No. 51806222

highlights

Eyecatching movements of 16 beams
Very high luminous efficiency
Sound control via integrated microphone

• Eyecatching beam movements • 16 beams move diametrically opposed up and down • Very high luminous efficiency • Sound-control via integrated microphone • Microphone-sensitivity adjustable via rotary-control • For party rooms, small discotheques or mobile DJs • Two 120 V/300 W lamps included • Easy lamp-exchange via service-lid

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	650 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	385 x 430 x 310 mm
Weight:	6.5 kg

Accessories:

OMNILUX 115-120V/150W GX-6.35 25h 3200K	No. 88293005
OSRAM 64501 115-120V/150W GX-6.35 25h	No. 88293010
OMNILUX 120V/300W GX-6.35 75h 3200K	No. 88294005
OSRAM 64514 120V/300W GX-6.35 75h	No. 88294010
PHILIPS 7010 120V/300W GX-6.35 150h	No. 88294015

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — *Lighting effects*

EUROLITE Multi Ray, 2 x 120V/300W

No. 51806223

highlights

Sound activated via built-in microphone
In total 60 beams provide a room-filling effect
Very high light output

• The beams exit from any of the lenses divided in three sections, perform a circular movement and change the direction of movement at any bass beat • In total 60 beams provide a room filling effect • Sound activated via built-in microphone • The response behaviour of the light effect can be regulated by a rotary regulator • Thousandfold proved effect • Very high light output • For party rooms, small discos or mobile DJs • Ready for connection with power plug • With two 120 V/300 W lamps

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*700 W*
Sound-control:	*via built-in microphone*
Dimensions (WxDxH):	*405 x 440 x 175 mm*
Weight:	*6 kg*

Accessories:

OMNILUX 115-120V/150W GX-6.35 25h 3200K	*No. 88293005*
OSRAM 64501 115-120V/150W GX-6.35 25h	*No. 88293010*
OMNILUX 120V/300W GX-6.35 75h 3200K	*No. 88294005*
OSRAM 64514 120V/300W GX-6.35 75h	*No. 88294010*
PHILIPS 7010 120V/300W GX-6.35 150h	*No. 88294015*

EUROLITE D-26/Apollo "C", 2 x 120V/300W

No. 51806227

highlights

Sound-controlled via built-in microphone
In total 40 beams provide a room-filling effect
Very high light output

• Two beams exit from every lens, perform a circular movement and change the direction of movement at every bass-beat • 2 rows of lenses with 20 differently coloured glass-lenses • In total 40 beams provide a room-filling effect • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Easy installation via mounting-bracket • Thousandfold proved effect • Very high light output • For party rooms, small discos or mobile DJs • Delivery in a four-colour carton • Ready for connection with safety-plug • Easy lamp-exchange via service-lid • For two 120 V/300 W lamps • Lamps have to be ordered separately

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*700 W*
Sound-control:	*via built-in microphone*
Dimensions (WxDxH):	*450 x 400 x 300 mm*
Weight:	*8.5 kg*

Accessories:

OMNILUX 120V/300W GX-6.35 75h 3200K	*No. 88294005*
OSRAM 64514 120V/300W GX-6.35 75h	*No. 88294010*
PHILIPS 7010 120V/300W GX-6.35 150h	*No. 88294015*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE D-26E/Apollo "EC", 2 x 120V/300W

highlights

No. 51806228

Sound-controlled via built-in microphone
In total 32 beams provide a room-filling effect
Very high light output

• Two beams exit from every lens, perform a circular movement and change the direction of movement at every bass-beat • 2 rows of lenses with 16 differently colored glass-lenses • In total 32 beams provide a room-filling effect • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Easy installation via mounting-bracket • Thousandfold proved effect • Very high light output • For party rooms, small discos or mobile DJs • Delivery in a four-colour carton • Ready for connection with safety-plug • Easy lamp-exchange via service-lid • For two 120 V/300 W lamps

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	550 W
Sound-control:	via built-in microphone
Dimensions (WxDxH):	435 x 380 x 355 mm
Weight:	8.1 kg

Accessories:

OMNILUX 115-120V/150W GX-6.35 25h 3200K	No. 88293005
OSRAM 64501 115-120V/150W GX-6.35 25h	No. 88293010
OMNILUX 120V/300W GX-6.35 75h 3200K	No. 88294005
OSRAM 64514 120V/300W GX-6.35 75h	No. 88294010
PHILIPS 7010 120V/300W GX-6.35 150h	No. 88294015

EUROLITE D-28, ELC 24V/250W

highlights

No. 51806231

The light beam moves from left to right and vice versa
High-quality motor
Ready for connection with safety plug

• Lighting effect with 8 clear lenses, the light-beam moves from left to right and vice versa • Constant colour-change with 4 dichroic colours + white with a constantly shining lamp • Beam-movement sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Easy installation via mounting-bracket • High-quality motor • Ready for connection with safety-plug • One ELC 24 V/250 W lamp has to be ordered separately • Easy lamp-exchange via service-lid • Ideal for mobile use, party-rooms and small discotheques

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	270 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	420 x 345 x 190 mm
Weight:	8.5 kg

Accessories:

GE ELC 24V/250W GX-5.3 50h w. 50mm refl.	No. 88264000
OMNILUX ELC 24V/250W GX-5.3 50h 50mm refl	No. 88264005
OSRAM ELC 64653HLX A1/259 24V/250W GX-5.3	No. 88264010
PHILIPS ELC 24V/250W GX-5.3 50h 50mm refl	No. 88264015
GE ELC 24V/250W GX-5,3 500h 50mm Refl.	No. 88264100
OMNILUX ELC 24V/250W GX-5.3 500h 50mm ref	No. 88264105
PHILIPS ELC 24V/250W GX-5.3 500h 50mm ref	No. 88264115
PHILIPS ELC 24V/250W GX-5.3 1000h	No. 88264215

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE Wing, 1 x 800W

highlights

No. 51812220

With eight, extremely focused tunnel beams
Especially voluminous effect via several wings
Ideal as additional machine to existing effects

• With eight, extremely focused tunnel beams • Especially voluminous effect via several wings • Ideal as additional machine to existing effects • Ideal as basic effect in entry areas or at concerts • Can be used as a chaser by connecting several wings • Ready for being connected with power plug • For 800 W Roundlux-lamp

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	900 W
Dimensions (LxWxH):	605 x 430 x 190mm
Weight:	7 kg

Accessories:

OMNILUX 230V/800W GX-9.5 3200K roundlux	No. 88343005

EUROLITE Z-20/Zig Zag "C", 2 x 120V/300W

highlights

No. 51812541

Sound-controlled via built-in microphone
With two 120 V/300 W lamps
Ready for connection with power plug

• Two beams from any of the lenses perform a circular movement and change the direction of movement at any bass beat • When using smoke, the brilliant colours are especially fortified • The wide radiation angle of the effect allows the use even in larger rooms • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • With two 120 V/300 W lamps • Ready for connection with power-plug • Comes in a 4-colour carton • Ideal for party-rooms, small discotheques or mobile discotheques

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	600 W
Sound-control:	Via built-in microphone
Dimensions (LxWxH):	360 x 280 x 280 mm
Weight:	3 kg

Accessories:

OMNILUX 120V/300W GX-6.35 75h 3200K	No. 88294005
OSRAM 64514 120V/300W GX-6.35 75h	No. 88294010
PHILIPS 7010 120V/300W GX-6.35 150h	No. 88294015

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE Z-30, 2x120V/300W + pole-burner

highlights

No. 51812544

Fan effect
Beam effect
Ready for being connected with power plug
Remote control inclusive

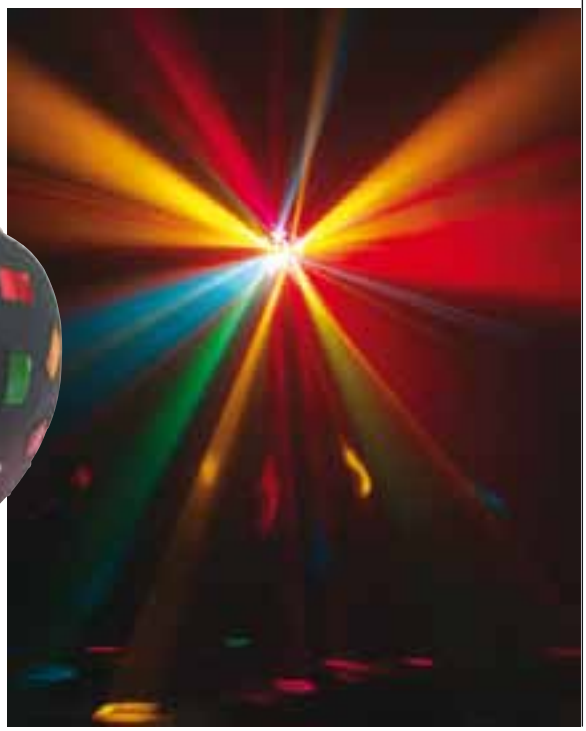

• Beam effect: Two beams from any of the lenses perform a circular movement and change the direction of movement at any bass beat • Fan effect: A large fan effect from any of the lenses performs a circular movement and change the direction of movement at any bass beat • The beam effect can be switched to a fan effect via the remote control included in delivery • Sound-controlled via built-in microphone • The response behaviour of the light effect can be regulated by a rotary regulator • The large illumination angle of the effect allows the use even in larger rooms • When using smoke, the brilliant colours are especially fortified • Ready for being connected with power plug • For two 120 V/300 W lamps (beam effect) and one R-7-s 500 W pole burner (fan effect)

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	530 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	435 x 290 x 290 mm
Weight:	4 kg

Accessories:

OMNILUX 120V/300W GX-6.35 75h 3200K	No. 88294005
OMNILUX 230V/500W R7s 117mm pole burner	No. 91100400
OSRAM 64514 120V/300W GX-6.35 75h	No. 88294010
PHILIPS 7010 120V/300W GX-6.35 150h	No. 88294015

EUROLITE Z-50 for 2x 120V/300W

highlights

No. 51812550

Sound-controlled via built-in microphone
Ready for connection with power plug
Ideal for party rooms, small discotheques or mobile DJs

• Beams from any of the lenses change the direction of movement at any bass beat • When using smoke, the brilliant colours are especially fortified • The wide radiation angle of the effect allows the use even in smaller rooms • Sound-controlled via built-in microphone • The response behaviour of the light effect can be regulated by a rotary regulator • For two 120 V/300 W lamps • Ready for connection with power-plug • Comes in a 4-colour carton • Ideal for party-rooms, small discotheques or mobile discotheques

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	600 W
Sound-control:	Via built-in microphone
Dimensions (LxWxH):	460 x 330 x 330 mm
Weight:	4 kg

Accessories:

OMNILUX 120V/300W GX-6.35 75h 3200K	No. 88294005
OSRAM 64514 120V/300W GX-6.35 75h	No. 88294010
PHILIPS 7010 120V/300W GX-6.35 150h	No. 88294015

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — *Lighting effects*

EUROLITE LED Z-100 RGB

No. 51918508

highlights

In the familiar Z-20 Zig-Zag housing
Luminance like 300 W Zig-Zag beam effect
Can be mounted as center piece via supplied brackets

• Two beams from every lens perform circular movements and change the direction of movement with every bass beat • When using smoke, the brilliant colors are especially fortified • The wide radiation angle of the effect allows the use even in larger rooms • Can be rigged from trussing or mounted as a center piece • Sound-controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Equipped with 66 x 5 mm RGB LEDs • Ready for connection with power cord and safety-plug • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*15 W*
Sound-control:	*via built-in microphone*
Number of 5mm LEDs:	*66*
LED beam angle:	*60°*
Dimensions (LxWxH):	*360 x 275 x 360 mm*
Weight:	*3 kg*

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	*No. 58000653*
EUROLITE TH-90 Theatre hook for 50mm pipe	*No. 58000720*
EUROLITE TH-200 Theatre hook max. 200 kg	*No. 58000740*

EUROLITE LED SCY-7 RGB

No. 51918670

highlights

1 row of lenses with 7 glass lenses
Up to 63 beams provide a room-filling effect
Easy installation via mounting bracket

• Nine beams exit from every lens and modulate with every bass-beat • 1 row of lenses with 7 glass-lenses • Up to 63 beams provide a room-filling effect • Sound-controlled via built-in microphone • Easy installation via mounting-bracket • Innumerable uses • Perfect in public places, main halls, stages, lounges • Ready for connection with power cord and safety-plug • Particularly bright illuminating power of the 5mm LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*12 W*
Sound-control:	*via built-in microphone*
Number of 5mm LEDs:	*63*
Beam angle:	*15°*
Dimensions (LxWxH):	*335 x 425 x 180 mm*
Weight:	*4.4 kg*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite | Lighting effects

EUROLITE LED SCY-100 RGBW DMX

No. 51918675

highlights

Classic beam effect in RGB and white
1 row of lenses with 7 glass lenses
27 beams exit from every lens

• 1 row of lenses with 7 glass lenses; 27 beams exit from every lens • Via DMX, each color (RGB + white) can be controlled at every lens • DMX-512 control via regular DMX-controller (occupies 9 channels) • Sound controlled via built-in microphone • Microphone-sensitivity adjustable via rotary-control • Strobe effect • Auto mode • Internal programs • Master/Slave function • Rugged compact housing in a beautiful design • Ready for connection with power cord and safety plug • Innumerable uses • Ideal for bands, stages or solo entertainers • Mounting bracket for installation on a trussing system included • Particularly bright illuminating power of the 5mm LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*25 W*
Number of DMX channels:	*9*
DMX-512 connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Number of LEDs:	*189 (Rx21, Gx21, Bx21, Wx126)*
Type of LEDs:	*5 mm*
Beam angle of each LED:	*15°*
Beam angle of the complete effect:	*approx. 150°*
Dimensions (LxWxH):	*355 x 460 x 155 mm*
Weight:	*4 kg*

EUROLITE B-10 black LED 230V/1X3W

No. 51918810.....white
No. 51918815.....multicolor

highlights

34 lenses
6 rotations per minute
For standing installation

• 34 lenses • 6 rotations per minute • For standing installation • On/Off switch with integrated monitor light • Ready for connection with power cord and safety-plug • Available in 2 versions: with transparent lenses and with colored lenses • Ideal for party-rooms, small discotheques or mobile discotheques • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*11 W*
Rotation-speed:	*approx. 6 RPM*
Number of LEDs:	*1 x 3W (white)*
Dimensions (LxWxH):	*195 x 195 x 175 mm*
Weight:	*1.5 kg*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE LED Z-500 RGBW DMX

highlights

No. 51918513

Particularly bright illuminating power of the 5 mm RGB + white LEDs
9 internal programs
Beams exit from the 8 lenses

• Beams from the 8 lenses perform circular movements and change the direction of movement with every bass beat • DMX-512 control via regular DMX-controller (occupies 7 channels) • Sound controlled via built-in microphone • Microphone sensitivity adjustable via rotary control • Strobe effect • Auto mode • 9 internal programs • Master/Slave function • Rugged compact housing in a beautiful design • Particularly bright illuminating power of the 5mm RGB + white LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation • Ready for connection with power cord and safety plug

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	35 W
Number of DMX channels:	4
DMX-512 connection:	3-pin XLR
Sound-control:	via built-in microphone
Number of 5mm LEDs:	160 (R:40, G:36, B:42, W:42)
Beam angle:	60°
Dimensions (LxWxH):	420 x 310 x 300 mm
Weight:	5 kg

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	No. 58000653
EUROLITE TH-90 Theatre hook for 50mm pipe	No. 58000720
EUROLITE TH-200 Theatre hook max. 200 kg	No. 58000740

EUROLITE LED Z-600 RGBW DMX

highlights

No. 51918514

Particularly bright illuminating power of the 5mm RGB + white LEDs
9 internal programs
Beams exit from the 6 lenses

• Beams from the 6 lenses perform circular movements and change the direction of movement with every bass beat • DMX-512 control via regular DMX-controller (occupies 7 channels) • Sound controlled via built-in microphone • Microphone sensitivity adjustable via rotary control • Strobe effect • Auto mode • 9 internal programs • Master/Slave function • Rugged compact housing in a beautiful design • Particularly bright illuminating power of the 5mm RGB + white LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation • Ready for connection with power cord and safety plug

Technical specifications:

Power supply:	230 V AC, 50 Hz ~
Power consumption:	30 W
Number of DMX channels:	4
DMX-512 connection:	3-pin XLR
Sound-control:	via built-in microphone
Number of 5mm LEDs:	156 (R:48, G:36, B:36, W:36)
Beam angle:	60°
Dimensions (LxWxH):	430 x 305 x 450 mm
Weight:	4.5 kg

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	No. 58000653
EUROLITE TH-90 Theatre hook for 50mm pipe	No. 58000720
EUROLITE TH-200 Theatre hook max. 200 kg	No. 58000740

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE LED QDF-4 RGBW DMX

No. 51918570

highlights

Full, color intensive beams exit from every lens
Via DMX, each color (RGB + white) can be controlled at every lens
Sound controlled via built-in microphone

• 1 row of 4 glass lenses • Full, color intensive beams exit from every lens • Via DMX, each color (RGB + white) can be controlled at every lens • DMX-512 control via regular DMX-controller (occupies 6 channels) • Sound controlled via built-in microphone • Strobe effect • Auto mode • Internal programs • Master/Slave function • Rugged compact housing in a beautiful design • Ready for connection with power cord and safety plug • Innumerable uses • Ideal for bands, stages or solo entertainers • Mounting bracket for installation on a trussing system included • Equipped with 228 x 5 mm LEDs • Particularly bright illuminating power of the 5mm LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*30 W*
Number of DMX channels:	*6*
DMX-512 connection:	*3-pin XLR*
Sound-control:	*via built-in microphone*
Number of 5mm LEDs:	*228*
Beam angle:	*15°*
Dimensions (LxWxH):	*315 x 470 x 175 mm*
Weight:	*4 kg*

Accessories:

EUROLITE TH-50H Theatre hook f.50mm pipe	*No. 58000653*
EUROLITE TH-90 Theatre hook for 50mm pipe	*No. 58000720*
EUROLITE TH-200 Theatre hook max. 200 kg	*No. 58000740*

EUROLITE KLS-8080 Complete light set

No. 42109540

highlights

The standard light system for every small band, solo entertainers and parties
4 channels with 8 lenses
Sound-control
Light stand

• The standard light system for every small band, solo entertainers and parties • 4 channels with 8 lenses • Sound-control • Light stand • Set consisting of:2x CLS-80 419070501x LCD-4MP/S 7006266620x ENH Lamp 882650052x EC cable 302475002x A1 stand 590069852x TV-10 60000725 • Details to the products:CLS-80 : Compact lighting-system • 4 channels with 8 lenses • Ideal for bands or solo entertainers • Extremely compact housing in a beautiful design • Extremely high light output • With dichroic colour-filters in red, yellow, blue and green for brilliant colours • Built-in ventilation-fans for permanent use • For eight ENH 120 V/250 W GY-5,3 lamps • Mounting bracket for installations on a stand or a crossbeam included • Power supply of the ventilation-fans via IEC-cable included in the delivery • Power supply of the lamps via 6-pin industrial plug • Recommended controllers: EUROLITE LCD-4 MP/ SLCD-4MP/S: 4-channel lighting controller • 4 channels • Fade Time fader with LED for adjusting the step time • Master-fader with LED for adjusting the total output level • Audio-fader with LED for adjusting the music sensitivity • Flash-button per channel and master-flash (Full On-button) • LED-display of all modes • 0/10 V-output via one 8-pin DIN-socket • 42 built-in programs • Dimmer: Manual control of the channels via sliders • Full On: all channels can be switched on together • Program speed adjustable via speed-fader or Tap Sync-button • Sound-control via external signal or integrated microphone • Sound to light via RCA-socket • Outputs via 4 safety sockets or two industrial sockets • 19"-dimensions with 3 unitsA1: Inexpensive steel-stand • Stable lighting stand for mobile use • The telescopic tube is additionally fixed with a safety pin • For up to 4 spots • With crossbeam • For TV-pins up to Ø 17 mm

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — *Lighting effects*

EUROLITE KLS-10 Compact lightset

No. 42109500

• 4 x 42000410 PAR-56 Lite Spot, incl. grille holder • 1 x 59006996 EUROLITE STV-40S lighting stand, Steel • 1 x 9410027A Colour-foil set 19x19cm, four colors • 1 x 70064435 EUROLITE DTB-403/short • 4 x 88125005 OMNILUX PAR-56 230V/300W

EUROLITE KLS-20 Compact lightset

No. 42109510

• 4 x 42000410 PAR-56 Lite Spot, incl. grille holder • 1 x 59006996 EUROLITE STV-40S lighting stand, Steel • 1 x 9410027A Colour-foil set 19x19cm, four colours • 1 x 70064435 EUROLITE DTB-405 • 1 x 70064490 EUROLITE Foot switch for DTB-405 • 4 x 88125005 OMNILUX PAR-56 230V/300W

EUROLITE KLS-30 Compact lightset

No. 42109520

• 4 x 42000410 PAR-56 Lite Spot, incl. grille holder • 1 x 59006996 EUROLITE STV-40S lighting stand, Steel • 1 x 9410027A Colour-foil set 19x19cm, four colors • 1 x 30248100 EUROLITE SB-46 split-box 15m+multi plug • 1 x 70062666 EUROLITE LCD-4 MP/S • 4 x 88125005 OMNILUX PAR-56 230V/300W

EUROLITE KLS-30E Extension set

No. 42109525

KLS-10

KLS-20

KLS-30

KLS-30E

• 4 x 42000410 PAR-56 Lite Spot, incl. grille holder • 1 x 59006996 EUROLITE STV-40S lighting stand, Steel • 1 x 9410027A Colour-foil set 19x19cm, four colors • 1 x 30248100 EUROLITE SB-46 split-box 15m+multi plug • 4 x 88125005 OMNILUX PAR-56 230V/300W

Technical specifications:

PAR-56 Lite Spot:	
Power supply:	*max. AC 230 V/50-60 Hz*
Power consumption:	*310 W*
Dimensions (LxWxH):	*240 x 215 x 235 mm*
Weight:	*1.3 kg*
Fitting lamp:	
GE PAR-56 230V/300W NSP 2000h	*No. 88125000*
OMNILUX PAR-56 230V/300W NSP 1000h	*No. 88125005*
GE PAR-56 230V/300W MFL 2000h	*No. 88125100*
GE PAR-56 230V/300W WFL 2000h	*No. 88125200*
Accessories:	
Colour filter frame	*No. 42000480*
STV-40S:	
Max. carrying capacity:	*18 kg*
Minimum height:	*1.5 m*
Maximum height:	*3.4 m*
Maximum elevation:	*1.5 m*
Weight:	*6 kg*
SB-46:	
Power supply:	*230 V AC, 50 Hz ~*
Max. power output:	*4600 W*
Max. total current:	*20 A*
Max. output/channel:	*1150 W*
Max. current/channel:	*5 A*
Dimensions (LxWxH):	*240 x 115 x 80 mm*
Weight:	*3.7 kg*

Transport case for KLS-20/KLS-30

No. 31000315

• Suits 1 light set and accessory • Interior and cover (not removable) black lacquered • High-quality workmanship with 7 mm plywood multilayered glued, black laminated • Aluminum profile frames (30 mm) with rounded edges • Three-leg, large steel ball corners (chromium plated) • 6 large butterfly locks (with locking function) • 3 hinged, chromium plated case handles

Technical specifications:

Strength:	*10 mm*
Outside dimensions (WxDxH):	*approx. 1680 x 405 x 455 mm*
Inside dimensions (w/o partitions):	
Mounting width:	*approx.1635 mm*
Mounting depth:	*approx. 360 mm*
Mounting height:	*approx. 420 mm*
Weight:	*approx. 35 kg*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite *Lighting effects*

EUROLITE KLS-100 LED system set

highlights

No. 42109502

1x EUROLITE LED KLS-100 incl. case
1x Foot switch for LED KLS light set
1x EUROLITE STV-40S Lighting stand, Steel

• The standard light system for every small band, solo entertainers and parties • 4 channels • Sound-control • Light stand • Set consisting of:1x EUROLITE LED KLS-100 incl. case1x Foot switch for LED KLS light set1x EUROLITE STV-40S Lighting stand, Steel • Details to the products:KLS-100:Mobile color creativity even easier! • Complete LED light set with 4 static spots • Compact size and easy to transport • Needs 4-pedal foot switch: Preset, Sound controlled, Freeze, Blackout (please order separately) • Sound-controlled via built-in microphone • Internal programs via 4-pedal foot switch • Ready for connection with power cord and safety plug • Innumerable uses: ideal for bands, stages or solo entertainers • Ideally suited for installation on a lighting stand • Stand not included in the delivery • Particularly bright illuminating power of the 10mm LEDs • 108 LEDs per color; 432 LEDs total • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiationFootswitch:Easy controlling at your fingertips...better said at your toes! • 4 pedal foot switch for the LED KLS-200 RGB DMX Lighting Set • Functions: Black out, Freeze, Sound control and Autoprogram for color change • Ready for connection via 5-pin connection cable with plugSTV-40S:Lighting stand made of steel • Stable lighting stand for mobile use • The telescopic tube is additionally fixed with a safety pin • For up to 4 spots • Crossbeam with TV-pin

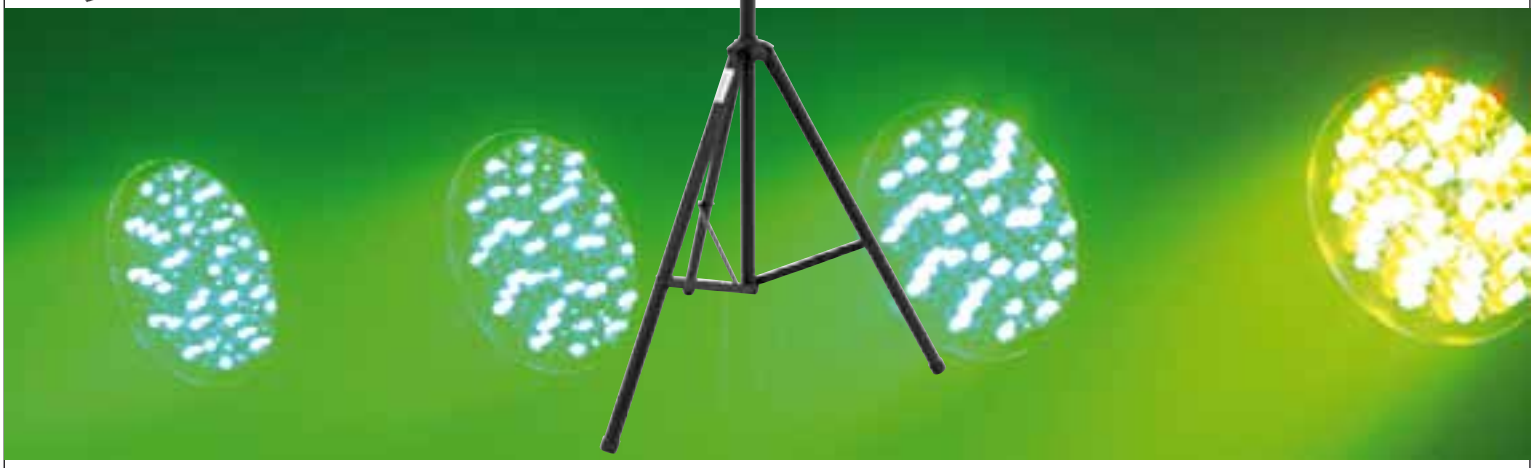

EUROLITE KLS-10 ECO lightset

highlights

No. 42109505

1 x 59006996 STV-40S Stand
1 x 70062608 Mini-4 Bar
4 x 42000420 PAR-56 Lite Spot Set

• 1 x 59006996 STV-40S Stand • 1 x 70062608 Mini-4 Bar • 4 x 42000420 PAR-56 Lite Spot Set (300W PAR-56 Lamp MFL; Color foil set 4-times; PAR-56 Lite Spot with plug)



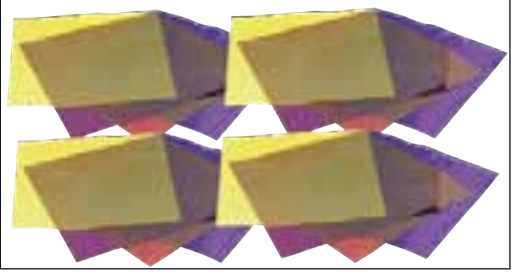

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — LED stage effects

EUROLITE LED KLS-100 incl. case

highlights

No. 42109600

Complete LED light set with 4 static spots
Compact size and easy to transport
108 LEDs per spot (one color each)
Particularly bright illuminating power of the 10mm LEDs

• Complete LED light set with 4 static spots • Compact size and easy to transport • Needs 4-pedal foot switch: Preset, Sound controlled, Freeze, Blackout (please order separately) • Sound-controlled via built-in microphone • Internal programs via 4-pedal foot switch • Ready for connection with power cord and safety plug • Innumerable uses: ideal for bands, stages or solo entertainers • Ideally suited for installation on a lighting stand • Stand not included in the delivery • Particularly bright illuminating power of the 10mm LEDs • 108 LEDs per color; 432 LEDs total • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*60 W*
Number of 10mm LEDs:	*432 (108 red, 108 green, 108 blue, 108 amber)*
Beam angle of LEDs:	*25°*
Dimensions (LxWxH):	*1200 x 55 x 310 mm*
Weight:	*7 kg*

Accessories:

Foot switch for LED KLS light set	*No. 42109710*
EUROLITE STV-40S Lighting stand, Steel	*No. 59006996*
EUROLITE STV-40A Lighting stand, alu	*No. 59007001*

EUROLITE LED KLS-200 RGB DMX incl. case

highlights

No. 42109700

Complete LED light set with 4 spots
Compact size and easy to transport
Particularly bright illuminating power of the 10mm LEDs
36 LEDs per color per spot

• Complete LED light set with 4 spots • Via DMX, each spot can be individually controlled • Compact size and easy to transport • Needs 4-pedal foot switch: Preset, Sound controlled, Freeze, Blackout (please order separately) • DMX-512 control via regular DMX-controller (occupies 15 channels) • Sound-controlled via built-in microphone • Strobe effect • Auto mode • Internal programs • Master/Slave function • Ready for connection with power cord and safety plug • Innumerable uses • Ideal for bands, stages or solo entertainers • Ideally suited for installation on a lighting stand • Stand not included in the delivery • Particularly bright illuminating power of the 10mm LEDs • 36 LEDs per color per spot • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*55 W*
DMX-control-channels:	*15*
DMX-512-connection:	*3-pin XLR*
Number of LEDs:	*432 10mm (144 red, 144 green, 144 blue)*
Beam angle of LEDs:	*25°*
Dimensions/case (LxWxH):	*1250 x 380 x 120 mm*
Weight:	*8 kg*

Accessories:

Foot switch for LED KLS light set	*No. 42109710*
EUROLITE STV-40S Lighting stand, Steel	*No. 59006996*
EUROLITE STV-40A Lighting stand, alu	*No. 59007001*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite **LED stage effects**

EUROLITE LED KLS-300 DMX incl. case

No. 42109750

highlights

Complete LED light set with 4 static spots
Compact size and easy to transport
180 LEDs per spot (one color each: red, green, blue, amber)
Particularly bright illuminating power of the 10mm LEDs

• Complete LED light set with 4 spots • Via DMX, each spot can be individually controlled • Compact size and easy to transport • Needs 4-pedal foot switch: Preset, Sound controlled, Freeze, Blackout (please order separately) • DMX-512 control via regular DMX-controller (occupies 7 channels) • Sound-controlled via built-in microphone • Strobe effect • Auto mode • Internal programs • Master/Slave function • Ready for connection with power cord and safety plug • Innumerable uses • Ideal for bands, stages or solo entertainers • Ideally suited for installation on a lighting stand • Stand not included in the delivery • Particularly bright illuminating power of the 10mm LEDs • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*85 W*
DMX-control-channels:	*7*
DMX-512-connection:	*3-pin XLR*
Number of LEDs:	*720 x 10mm (180 per color: red, green, blue, amber)*
Beam angle of LEDs:	*25°*
Dimensions (LxWxH):	*1200 x 55 x 310 mm*
Weight:	*8.5 kg*

EUROLITE LED KLS-400 RGB DMX incl. case

No. 42109780

highlights

Complete LED light set with 4 spots
Compact size and easy to transport
Particularly bright illuminating power of the 10mm LEDs
60 LEDs per color per spot

• Complete LED light set with 4 spots • Via DMX, each spot can be individually controlled • Compact size and easy to transport • Needs 4-pedal foot switch: Preset, Sound controlled, Freeze, Blackout (please order separately) • DMX-512 control via regular DMX-controller (occupies 15 channels) • Sound-controlled via built-in microphone • Strobe effect • Auto mode • Internal programs • Master/Slave function • Ready for connection with power cord and safety plug • Innumerable uses • Ideal for bands, stages or solo entertainers • Ideally suited for installation on a lighting stand • Stand not included in the delivery • Particularly bright illuminating power of the 10mm LEDs • 60 LEDs per color per spot • Advantages of LED-technology: extremely long life of the LEDs, low power consumption, minimal heat emission, defacto maintenance free with brilliant light radiation

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*85 W*
DMX-control channels:	*15*
DMX-512 connection:	*3-pin XLR*
Number of LEDs:	*720 (240 red, 240 green, 240 blue)*
Type of LEDs:	*10 mm*
Beam angle of LEDs:	*25°*
Dimensions (LxWxH):	*1200 x 55 x 310 mm*
Weight:	*8.5 kg*

Accessories:

Foot switch for LED KLS light set	*No. 42109710*
EUROLITE STV-40S Lighting stand, Steel	*No. 59006996*
EUROLITE STV-40A Lighting stand, alu	*No. 59007001*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — Lighting effects

EUROLITE HPS-1500 DMX RGB

highlights

No. 41601025

DMX controlled Spot
RGB color mixing
High-quality housing for high stability

• DMX controlled Spot • RGB colour mixing • High-quality housing for high stability • 3 x 500W lamps • Barndoors included in the delivery • Ideal for theatres, large stages and mobile use

Technical specifications:	
Power supply:	230 V AC, 50 Hz ~
Power consumption:	1500 W
Dimensions:	385 x 320 x 330 mm
Weight:	6 kg

Accessories:	
GE A1/244 240V/500W GY-9.5 75h	No. 88384000
OMNILUX A1 230V/500W GY-9.5 75h	No. 88384005
OSRAM 64680 A1/244 230V/500W GY-9.5 50h	No. 88384010
PHILIPS 7389 A1/244 230V/500W GY-9.5 75h	No. 88384015
GE CP82 FRJ 240V/500W GY-9.5 150h 3200K	No. 88384100
OMNILUX FRJ 230V/500W GY-9.5 150h 3200K	No. 88384105
OSRAM 230V/500W GY-9.5 300h 3200K	No. 88384110
PHILIPS 6820P 230V/500W GY-9.5 360h 3000K	No. 88384115
GE M40 240V/500W GY-9.5 2000h	No. 88384200
OMNILUX 230V/500W GY-9.5 2000h 2900K	No. 88384205
OSRAM 64672 M40 230V/500W GY-9.5 2000h	No. 88384210
PHILIPS 6877P 230V/500W GY-9.5 2000h	No. 88384215
GE T18 GCW 240V/500W GY-9.5 400h 3050K	No. 88384300
EUROLITE DMX scene setter	No. 70064540
EUROLITE DMX scene setter 24/48	No. 70064545
EUROLITE LCD-4 DMX dimmer controller	No. 70064590
EUROLITE LCD-12 DMX dimmer controller	No. 70064592
Wizard-1024 USB DMX software + interface	No. 51860110
Wizard-512 USB DMX software + interface	No. 51860102

Rotatable barndoor for EUROLITE HPS-1500

No. 41601030
• Rotatable barndoors

EUROLITE RGB FLOOD-1500 DMX

highlights

No. 41601050

4 DMX channels
RGB floodlight with internal programs
Sound-controlled

• 4 DMX channels • RGB floodlight with internal programs • Sound-controlled • Sensitivity adjustable via rotary-control • Master/Slave operation • High-quality housing for high stability • 3 x 300W R7s lamps • Ideal for theatres, large stages and mobile use

Technical specifications:	
Power supply:	230 V AC, 50 Hz ~
Power consumption:	1000 W
Dimensions:	180 x 355 x 340 mm
Weight:	6.6 kg

Accessories:	
OMNILUX 230V/300W R7s 117mm pole burner	No. 91100300

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

EUROLITE CLS-41 Floodlight with controller

highlights

No. 41907055

Master / slave function
4 channels with 4 lenses
Extremely high light output

• With integrated control for program selection and speed adjustment • Master/slave-function • Slaves-connection via 9-pin Sub-D socket • 4 channels with 4 lenses • Ideal for bands or solo entertainers • Remote-control via optional footswitch • Extremely compact housing in a beautiful design • Extremely high light output • With dichroic colour-filters in red, yellow, blue and green for brilliant colours • Built-in ventilation-fans for permanent use • For four 230V/500W R7S 117mm pole-burners • Mounting bracket for installations on a stand or a crossbeam included

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*700 W*
Dimensions (LxWxH):	*510 x 195 x 320 mm*
Weight:	*6.5 kg*

Accessories:

OMNILUX 230V/500W R7s 117mm pole burner	*No. 91100400*
EUROLITE Foot controller with stereo jack	*No. 70064490*

EUROLITE CLS-81 Floodlight with controller

highlights

No. 41907060

4 channels with 8 lenses
Ideal for bands or solo entertainers
Extremely high light output

• With integrated control for program selection and speed adjustment • Master/slave-function • Slaves-connection via 9-pin Sub-D socket • 4 channels with 8 lenses • Ideal for bands or solo entertainers • Remote-control via optional footswitch • Extremely compact housing in a beautiful design • Extremely high light output • With dichroic colour-filters in red, yellow, blue and green for brilliant colours • Built-in ventilation-fans for permanent use • For eight ENH 120 V/250 W GY-5,3 lamps • Mounting bracket for installations on a stand or a crossbeam included

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*700 W*
Dimensions (LxWxH):	*405 x 200 x 310 mm*
Weight:	*5.5 kg*

Accessories:

GE ENH 120V/250W GY-5.3 w. 50mm reflector	*No. 88265000*
OMNILUX ENH 120V/250W GY-5.3 175h	*No. 88265005*
PHILIPS ENH 13095 120V/250W GY-5.3 175h	*No. 88265015*
EUROLITE Foot controller with stereo jack	*No. 70064490*

EUROLITE CLS-82 DMX for 8x ENH lamp

highlights

No. 41907070

4 channels with 8 lenses
Ideal for bands or solo entertainers
Extremely high light output

• 3-pin XLR sockets for DMX 512 In and Out for DMX-control • With internal controller for program selection and adjustment • Master/slave-function • MIDI Functions • 4 channels with 8 lenses • Ideal for bands or solo entertainers • Extremely compact housing in a beautiful design • Extremely high light output • With dichroic colour-filters in red, pink, blue and green for brilliant colours • Built-in ventilation-fans for permanent use • For eight ENH 120 V/250 W GY-5,3 lamps • Mounting bracket for installations on a stand or a crossbeam included

Technical specifications:

Power supply:	*230 V/50 Hz*
Power consumption:	*2000 W*
DMX-control-channels:	*4*
DMX-512-connection:	*3-pin XLR*
Dimensions (LxWxH):	*500 x 160 x 270 mm*
Weight:	*7.5 kg*

Accessories:

GE ENH 120V/250W GY-5.3 w. 50mm reflector	*No. 88265000*
OMNILUX ENH 120V/250W GY-5.3 175h	*No. 88265005*
PHILIPS ENH 13095 120V/250W GY-5.3 175h	*No. 88265015*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.

eurolite — *Lighting effects*

EUROLITE Light module set RFL-3, 3 channels

highlights

No. 42110090

Module-type light organ
Easy slip-in system for individual shapes and colors
Chaser-speed adjustable via speed control

• Chaser in modular form • Easy slip-in system for individual shapes and colors • Chaser-speed adjustable via Speed control • Sound-control via built-in microphone • Microphone-sensitivity adjustable via Music control • Controller with power-cable and euro-plug • 230 V/60 W E-27 lamps already installed

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*70 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*485 x 145 x 160 mm*
Weight:	*1.3 kg*

Accessories:

OMNILUX R80 230V/60W E-27 red	*No. 9210360U*
OMNILUX R80 230V/60W E-27 yellow	*No. 9210400U*
OMNILUX R80 230V/60W E-27 green	*No. 9210410U*
OMNILUX R80 230V/60W E-27 blue	*No. 9210420U*
OMNILUX R80 230V/60W E-27 orange	*No. 9210430U*
OMNILUX R80 230V/60W E-27 violet	*No. 9210440U*

EUROLITE Light module set RFL-4, 4 channels

highlights

No. 42110110

Module-type light organ
Easy slip-in system for individual shapes and colors
Chaser-speed adjustable via speed control

• Chaser in modular form • Easy slip-in system for individual shapes and colors • Chaser speed adjustable • Sound control via built-in microphone • Microphone sensitivity adjustable • Controller with power cable and euro plug • 230 V/60 W E-27 lamps already installed

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*70 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*155 x 350 x 245 mm*
Weight:	*1.5 kg*

Accessories:

OMNILUX R80 230V/60W E-27 red	*No. 9210360U*
OMNILUX R80 230V/60W E-27 yellow	*No. 9210400U*
OMNILUX R80 230V/60W E-27 green	*No. 9210410U*
OMNILUX R80 230V/60W E-27 blue	*No. 9210420U*
OMNILUX R80 230V/60W E-27 orange	*No. 9210430U*
OMNILUX R80 230V/60W E-27 violet	*No. 9210440U*

EUROLITE Light module set RFL-6, 6 channels

highlights

No. 42110130

Module-type light organ
Easy slip-in system for individual shapes and colors
Chaser-speed adjustable via speed control

• Chaser in modular form • Easy slip-in system for individual shapes and colors • Chaser speed adjustable • Sound-control via built-in microphone • Microphone sensitivity adjustable • Controller with power cable and euro plug • 230 V/60 W E-27 lamps already installed

Technical specifications:

Power supply:	*230 V AC, 50 Hz ~*
Power consumption:	*70 W*
Sound-control:	*via built-in microphone*
Dimensions (LxWxH):	*155 x 350 x 350 mm*
Weight:	*2 kg*

Accessories:

OMNILUX R80 230V/60W E-27 red	*No. 9210360U*
OMNILUX R80 230V/60W E-27 yellow	*No. 9210400U*
OMNILUX R80 230V/60W E-27 green	*No. 9210410U*
OMNILUX R80 230V/60W E-27 blue	*No. 9210420U*
OMNILUX R80 230V/60W E-27 orange	*No. 9210430U*
OMNILUX R80 230V/60W E-27 violet	*No. 9210440U*

Delivery, technical changes, errors and omissions exempted. Please take notice of the user manuals and latest information which can be downloaded from our site. All pictures are similar and partially symbolic.